



Double Date Project

AIR QUALITY IMPACT ANALYSIS

CITY OF COACHELLA

PREPARED BY:

Haseeb Qureshi
hqureshi@urbanxroads.com
(949) 660-1994 x217

Stephen Abille
sabile@urbanxroads.com
(949) 660-1994 x234

OCTOBER 1, 2014

TABLE OF CONTENTS

TABLE OF CONTENTS	I
APPENDICES	II
LIST OF EXHIBITS	III
LIST OF TABLES	III
LIST OF ABBREVIATED TERMS	IV
1 INTRODUCTION	I
1.1 Project Location	i
1.2 Project Description.....	i
1.3 Existing Land Uses.....	i
1.4 Summary of Findings.....	i
1.5 Standard Regulatory Requirements/Best Available Control Measures (BACMs).....	iv
1.6 Construction-Source Mitigation Measures.....	v
1.7 Operational-Source Mitigation Measures	v
2 AIR QUALITY SETTING	1
2.1 Atmospheric Setting.....	1
2.2 Existing Air Quality	2
2.3 Regional Air Quality	4
2.4 Local Air Quality	4
2.5 Regulatory Background.....	10
2.6 Existing Project Site Air Quality Conditions	12
3 PROJECT AIR QUALITY IMPACT	13
3.1 Introduction	13
3.2 Standards of Significance	13
3.3 Project-Related Sources of Potential Impact	14
3.4 Construction Emissions.....	14
3.5 operational Emissions	17
3.6 Localized Significance - Construction Activity.....	19
3.7 Localized Significance – Long-Term Operational Activity	22
3.8 CO “Hot Spot” Analysis	22
3.9 Air Quality Management Planning.....	23
3.10 Potential Impacts to Sensitive Receptors	25
3.11 Odors.....	25
3.12 Cumulative Impacts	26
4 REFERENCES	27
5 CERTIFICATION	29

APPENDICES

APPENDIX 3.1: CALEEMOD EMISSIONS OUTPUTS

APPENDIX 3.2: STATE/FEDERAL ATTAINMENT STATUS OF CRITERIA POLLUTANTS

LIST OF EXHIBITS

EXHIBIT 1-A: LOCATION MAPII
EXHIBIT 1-B: CONCEPTUAL SITE PLANIII

LIST OF TABLES

TABLE 2-1: AMBIENT AIR QUALITY STANDARDS3
TABLE 2-2: ATTAINMENT STATUS OF CRITERIA POLLUTANTS IN THE SALTON SEA AIR BASIN (SSAB)6
TABLE 2-3: PROJECT AREA AIR QUALITY MONITORING SUMMARY 2011-2013.....7
TABLE 3-1: MAXIMUM DAILY EMISSIONS REGIONAL THRESHOLDS14
TABLE 3-2: CONSTRUCTION DURATION.....15
TABLE 3-3: CONSTRUCTION EQUIPMENT ASSUMPTIONS16
TABLE 3-4: EMISSIONS SUMMARY OF OVERALL CONSTRUCTION (WITHOUT BACMS)17
TABLE 3-5: EMISSIONS SUMMARY OF OVERALL CONSTRUCTION (WITH BACMS)17
TABLE 3-6: SUMMARY OF PEAK OPERATIONAL EMISSIONS19
TABLE 3-7: LOCALIZED SIGNIFICANCE SUMMARY CONSTRUCTION (WITHOUT BACMS).....21
TABLE 3-8: LOCALIZED SIGNIFICANCE SUMMARY CONSTRUCTION (WITH BACMS)22
TABLE 3-9: LOCALIZED SIGNIFICANCE SUMMARY OPERATIONS22

LIST OF ABBREVIATED TERMS

(1)	Reference
µg/m ³	Microgram per Cubic Meter
AADT	Annual Average Daily Trips
AQIA	Air Quality Impact Analysis
AQMD	Air Quality Management District
AQMP	Air Quality Management Plan
ARB	California Air Resources Board
BACM	Best Available Control Measures
BMPs	Best Management Practices
CAA	Federal Clean Air Act
CAAQS	California Ambient Air Quality Standards
CalEEMod	California Emissions Estimator Model
Caltrans	California Department of Transportation
CAPCOA	California Air Pollution Control Officers Association
CARB	California Air Resources Board
CCR	California Code of Regulations
CEQA	California Environmental Quality Act
CFR	Code of Federal Regulations
CO	Carbon Monoxide
DPM	Diesel Particulate Matter
EPA	Environmental Protection Agency
LST	Localized Significance Threshold
NAAQS	National Ambient Air Quality Standards
NO ₂	Nitrogen Dioxide
NO _x	Oxides of Nitrogen
Pb	Lead
PM ₁₀	Particulate Matter 10 microns in diameter or less
PM _{2.5}	Particulate Matter 2.5 microns in diameter or less
PPM	Parts Per Million
Project	Double Date Project
ROG	Reactive Organic Gases
SCAQMD	South Coast Air Quality Management District
SIPs	State Implementation Plans
SRA	Source Receptor Area
SSAB	Salton Sea Air Basin
TAC	Toxic Air Contaminant

TIA	Traffic Impact Analysis
TOG	Total Organic Gases
VMT	Vehicle Miles Traveled
VOC	Volatile Organic Compounds

This page intentionally left blank

1 INTRODUCTION

This report presents the results of the air quality impact analysis (AQIA) prepared by Urban Crossroads, Inc., for the proposed Double Date Project (referred to as “Project”).

The purpose of this AQIA is to evaluate the potential impacts to air quality associated with construction and operation of the proposed Project, and recommend measures to mitigate impacts considered potentially significant in comparison to established regulatory thresholds.

1.1 PROJECT LOCATION

The proposed Project is located on the south side of Industrial Way abutting the west side of the Coca Cola distributing facility in the City of Coachella as shown on Exhibit 1-A. The Project site is currently vacant, with industrial and business park uses in its immediate vicinity.

1.2 PROJECT DESCRIPTION

The Project is proposed to construct a new warehouse facility consisting of three main structures with a total area of 38,906 square feet including a date packing plant and related cold-storage structures as shown on Exhibit 1-B. For the purposes of this AQIA, it is assumed that the Project will be constructed and at full occupancy by 2015.

1.3 EXISTING LAND USES

The Project site is currently vacant, undeveloped and not generating quantifiable emissions.

1.4 SUMMARY OF FINDINGS


Short-Term Construction

For regional emissions, the Project would not exceed the numerical thresholds of significance established by the South Coast Air Quality Management District (SCAQMD). Best available control measures (BACM AQ-1 and BACM AQ-2) are recommended to further reduce the severity of the impacts. Thus a less than significant impact will occur without/with implementation of BACM AQ-1 and BACM AQ-2.

Without BACMs, emissions during construction activity will not exceed the SCAQMD’s localized significance threshold for any of the applicable emissions. It should be noted that the impacts without BACMs do not take credit for reductions achieved through standard regulatory requirements (Rule 403). Therefore, a less than significant impact would occur without/with the application of BACMS.

Project construction-source emissions would not conflict with the applicable Air Quality Management Plan (AQMP).

EXHIBIT 1-A: LOCATION MAP

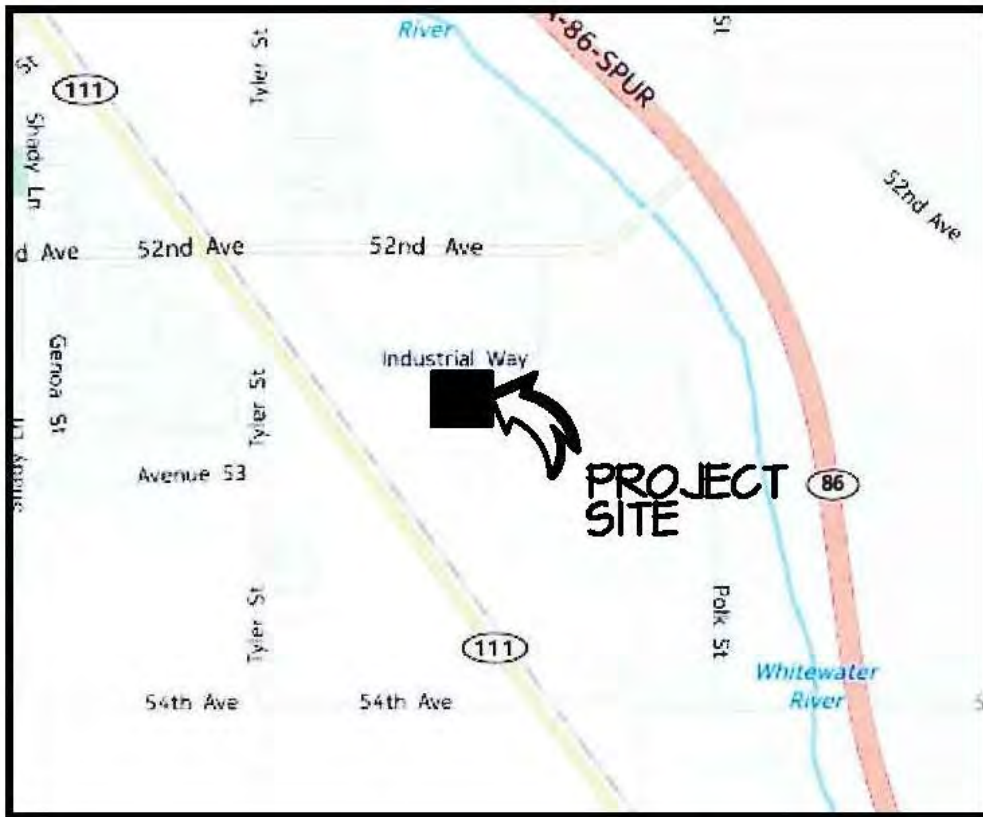

Established requirements addressing construction equipment operations, and construction material use, storage, and disposal requirements act to minimize odor impacts that may result from construction activities. Moreover, construction-source odor emissions would be temporary, short-term, and intermittent in nature and would not result in persistent impacts that would affect substantial numbers of people. Potential construction-source odor impacts are therefore considered less-than-significant.

Long-Term Operational

For regional emissions, the Project would not exceed the numerical thresholds of significance established by the SCAQMD. Thus a less than significant impact would occur for Project-related operational-source emissions.

Project operational-source emissions would not result in or cause a significant localized air quality impact as discussed in the operational LSTs section of this report. The proposed Project would not result in a significant CO “hotspot” as a result of Project related traffic during ongoing operations, nor would the Project result in a significant adverse health impact as discussed in Section 3.8, thus a less than significant impact to sensitive receptors during operational activity is expected. Project operational-source emissions would not conflict with the AQMP.

Substantial odor-generating sources include land uses such as agricultural activities, feedlots, wastewater treatment facilities, landfills or various heavy industrial uses. The Project does not propose any such uses or activities that would result in potentially significant operational-source odor impacts. Potential sources of operational odors generated by the Project would include disposal of miscellaneous residential refuse. Moreover, SCAQMD Rule 402 acts to prevent occurrences of odor nuisances (1). Consistent with City requirements, all Project-generated refuse would be stored in covered containers and removed at regular intervals in compliance with solid waste regulations. Potential operational-source odor impacts are therefore considered less-than-significant.

1.5 STANDARD REGULATORY REQUIREMENTS/BEST AVAILABLE CONTROL MEASURES (BACMs)

Measures listed below (or equivalent language) shall appear on all Project grading plans, construction specifications and bid documents, and the City shall ensure such language is incorporated prior to issuance of any development permits. City monitoring of construction activities shall be conducted to ensure mitigation compliance.

SCAQMD Rules that are currently applicable during construction activity for this Project include but are not limited to: Rule 1113 (Architectural Coatings) (2); Rule 431.2 (Low Sulfur Fuel) (3); Rule 403 (Fugitive Dust) (4); and Rule 1186 / 1186.1 (Street Sweepers) (5). In order to facilitate monitoring and compliance, applicable SCAQMD regulatory requirements are summarized below.

BACM AQ-1

The following measures shall be incorporated into Project plans and specifications as implementation of Rule 403 (4):

- All clearing, grading, earth-moving, or excavation activities shall cease when winds exceed 25 mph per SCAQMD guidelines in order to limit fugitive dust emissions.
- The contractor shall ensure that all disturbed unpaved roads and disturbed areas within the Project are watered at least three (3) times daily during dry weather. Watering, with complete coverage of disturbed areas, shall occur at least three times a day, preferably in the mid-morning, afternoon, and after work is done for the day.
- The contractor shall ensure that traffic speeds on unpaved roads and Project site areas are reduced to 15 miles per hour or less

Additional regulatory requirements that are in effect during Project construction include the following:

BACM AQ-2

The California Air Resources Board, in Title 13, Chapter 10, Section 2485, Division 3 of the of the California Code of Regulations, imposes a requirement that heavy duty trucks accessing the site shall not idle for greater than five minutes at any location. This measure is intended to apply to construction traffic. Grading plans shall reference that a sign shall be posted on-site stating that construction workers need to shut off engines at or before five minutes of idling (6).

1.6 CONSTRUCTION-SOURCE MITIGATION MEASURES

No significant impacts were identified and no mitigation measures are required

1.7 OPERATIONAL-SOURCE MITIGATION MEASURES

No significant impacts were identified and no mitigation measures are required

This page intentionally left blank

2 AIR QUALITY SETTING

This section provides an overview of the existing air quality conditions in the Project area and region.

2.1 ATMOSPHERIC SETTING

The Project site and the Coachella Valley are located in the northern region of the Salton Sea Air Basin (SSAB) within the jurisdiction of the South Coast Air Quality Management District (SCAQMD). The SSAB (also referred to herein as “the Basin”) is aligned in a north-west-southwest orientation stretching from Banning Pass to the Mexican border. The regional climate, as well as the temperature, wind, humidity, precipitation, and amount of sunshine significantly influence the air quality in the Basin.

The climate of the Coachella Valley is a continental, desert-type climate, with hot summers, mild winters, and very little annual rainfall. Precipitation is less than six inches annually and occurs mostly in the winter months from active frontal systems and in the late summer months from thunderstorms. Almost all of the annual rainfall comes from the fringes of mid-latitude storms from late November to early April with summers often being completely dry. Temperatures exceed 100 degrees Fahrenheit (°F), on the average, for four months each year, with daily highs near 110 °F during July and August. Summer nights are cooler with minimum temperatures in the mid-70s. During the winter season, daytime highs are quite mild, but the dry air is conducive to nocturnal radiational cooling, with early morning lows around 40 °F.

The Coachella Valley and adjacent areas are exposed to frequent gusty winds. The flat terrain of the valley and strong temperature differentials, created by intense solar heating, produce moderate winds and deep thermal convection. Wind speeds exceeding 31 miles per hour (mph) occur most frequently in April and May. On an annual basis, strong winds (greater than 31 mph) are observed 0.6 percent of the time and speeds of less than 6.8 mph account for more than one-half of the observed winds. Prevailing winds are from the northwest through southwest, with secondary flows from the southeast. The strongest and most persistent winds typically occur immediately to the east of Banning Pass, which is noted as a wind power generation resource area. Aside from this locale, the wind conditions in the remainder of the Coachella Valley are geographically distinct. Stronger winds tend to occur closer to the foothills. Less frequently, widespread gusty winds occur over all areas of the Valley.

Portions of the SSAB experience surface inversions almost every day of the year. Inversions in the SSAB are attributed to strong surface heating, but are usually broken, allowing pollutants to disperse more easily. Weak surface inversions are caused by cooling of air in contact with the cold surface of the earth at night. In the valleys and low-lying areas, this condition is intensified by the addition of cold air flowing downslope from the hills and pooling on the valley floor. In addition, inversions in the SSAB caused by the presence of the Pacific high-pressure cell can cause the air mass aloft to sink. As the air descends, compressional heating warms the air to a temperature higher than the air below. This subsidence inversion can act as a nearly impenetrable lid to the vertical mixing of pollutants. These inversions can persist for one or

more days, causing air stagnation and the buildup of pollutants. Subsidence inversions are common from November through June, and are relatively absent from July through October

Within the Project area, there is a natural sand migration process, called “blowsand,” that has direct and indirect effects on air quality. Blowsand produces particulate matter (PM₁₀) in two ways: (1) by direct particle erosion and fragmentation as natural PM₁₀, and (2) by secondary effects, as sand deposits on road surfaces.

Also, where water has already receded around the Salton Sea, the surface areas contain a salty mix of sediments that can change from a hardened salt crust to a fluffy soft layer of dust depending upon the season. Exposed sediments could elevate PM₁₀ levels throughout the region. Almost 120,000 acres of Salton Sea lakebed could be exposed as inflows to the Sea decrease in future years. Local communities may be affected by 60,000 potentially dust-blowing acres, which will cause PM₁₀ levels to rise.

2.2 EXISTING AIR QUALITY

Existing air quality is measured at established SCAQMD air quality monitoring stations. Monitored air quality is evaluated and in the context of ambient air quality standards. These standards are the levels of air quality that are considered safe, with an adequate margin of safety, to protect the public health and welfare. National Ambient Air Quality Standards (NAAQS) and California Ambient Air Quality Standards (CAAQS) currently in effect, as well health effects of each pollutant regulated under these standards are shown in Table 2-1 (7)(8).

The determination of whether a region’s air quality is healthful or unhealthful is determined by comparing contaminant levels in ambient air samples to the state and federal standards presented in Table 2-1. The air quality in a region is considered to be in attainment by the state if the measured ambient air pollutant levels for O₃, CO, SO₂, NO₂, PM₁₀, and PM_{2.5} are not equaled or exceeded at any time in any consecutive three-year period; and the federal standards (other than O₃, PM₁₀, PM_{2.5}, and those based on annual averages or arithmetic mean) are not exceeded more than once per year. The O₃ standard is attained when the fourth highest eight-hour concentration in a year, averaged over three years, is equal to or less than the standard. For PM₁₀, the 24 hour standard is attained when 99 percent of the daily concentrations, averaged over three years, are equal to or less than the standard.

TABLE 2-1: AMBIENT AIR QUALITY STANDARDS

Pollutant	Averaging Time	California Standards ¹		National Standards ²		
		Concentration ³	Method ⁴	Primary ^{3,5}	Secondary ^{3,6}	Method ⁷
Ozone (O ₃)	1 Hour	0.09 ppm (180 µg/m ³)	Ultraviolet Photometry	—	Same as Primary Standard	Ultraviolet Photometry
	8 Hour	0.070 ppm (137 µg/m ³)		0.075 ppm (147 µg/m ³)		
Respirable Particulate Matter (PM10) ⁸	24 Hour	50 µg/m ³	Gravimetric or Beta Attenuation	150 µg/m ³	Same as Primary Standard	Inertial Separation and Gravimetric Analysis
	Annual Arithmetic Mean	20 µg/m ³		—		
Fine Particulate Matter (PM2.5) ⁸	24 Hour	—	—	35 µg/m ³	Same as Primary Standard	Inertial Separation and Gravimetric Analysis
	Annual Arithmetic Mean	12 µg/m ³	Gravimetric or Beta Attenuation	12.0 µg/m ³		
Carbon Monoxide (CO)	1 Hour	20 ppm (23 mg/m ³)	Non-Dispersive Infrared Photometry (NDIR)	35 ppm (40 mg/m ³)	—	Non-Dispersive Infrared Photometry (NDIR)
	8 Hour	9.0 ppm (10 mg/m ³)		9 ppm (10 mg/m ³)	—	
	8 Hour (Lake Tahoe)	6 ppm (7 mg/m ³)		—	—	
Nitrogen Dioxide (NO ₂) ⁹	1 Hour	0.18 ppm (339 µg/m ³)	Gas Phase Chemiluminescence	100 ppb (188 µg/m ³)	—	Gas Phase Chemiluminescence
	Annual Arithmetic Mean	0.030 ppm (57 µg/m ³)		0.053 ppm (100 µg/m ³)	Same as Primary Standard	
Sulfur Dioxide (SO ₂) ¹⁰	1 Hour	0.25 ppm (655 µg/m ³)	Ultraviolet Fluorescence	75 ppb (196 µg/m ³)	—	Ultraviolet Fluorescence; Spectrophotometry (Pararosaniline Method)
	3 Hour	—		—	0.5 ppm (1300 µg/m ³)	
	24 Hour	0.04 ppm (105 µg/m ³)		0.14 ppm (for certain areas) ¹⁰	—	
	Annual Arithmetic Mean	—		0.030 ppm (for certain areas) ¹⁰	—	
Lead ^{11,12}	30 Day Average	1.5 µg/m ³	Atomic Absorption	—	—	High Volume Sampler and Atomic Absorption
	Calendar Quarter	—		1.5 µg/m ³ (for certain areas) ¹²	Same as Primary Standard	
	Rolling 3-Month Average	—		0.15 µg/m ³		
Visibility Reducing Particles ¹³	8 Hour	See footnote 13	Beta Attenuation and Transmittance through Filter Tape	No National Standards		
Sulfates	24 Hour	25 µg/m ³	Ion Chromatography			
Hydrogen Sulfide	1 Hour	0.03 ppm (42 µg/m ³)	Ultraviolet Fluorescence			
Vinyl Chloride ¹¹	24 Hour	0.01 ppm (26 µg/m ³)	Gas Chromatography			

See footnotes at: <http://www.arb.ca.gov/research/aaqs/aaqs2.pdf>

For more information please call ARB-PIO at (916) 322-2990

California Air Resources Board (6/4/13)

2.3 REGIONAL AIR QUALITY

The SCAQMD monitors levels of various criteria pollutants at 30 monitoring stations throughout the air district. In 2013, the federal and state ambient air quality standards (NAAQS and CAAQS) were exceeded on one or more days for ozone, PM₁₀, and PM_{2.5} at most monitoring locations (9). No areas of the SSAB exceeded federal or state standards for NO₂, SO₂, CO, sulfates or lead. See Table 2-2 for attainment designations for the SSAB (10)(11). Appendix 3.2 provides geographic representation of the state and federal attainment status for applicable criteria pollutants within the SSAB.

2.4 LOCAL AIR QUALITY

Relative to the Project site, The nearest long-term air quality monitoring site in relation to the project for Ozone (O₃), Inhalable Particulates (PM₁₀), and Ultra-Fine Particulates (PM_{2.5}) is carried out by the Salton Sea Air Basin at the Coachella Valley 2 monitoring station (SRA 30) located approximately 4 miles northwest of the project site (12). Data for Carbon Monoxide (CO) and Nitrogen Dioxide (NO₂) was obtained from the Coachella Valley 1 monitoring station (SRA 30) located approximately 25.5 miles northwest of the project site. It should be noted that the Coachella Valley 1 monitoring station was utilized in lieu of the Coachella Valley 2 monitoring station only where data was not available from the nearest monitoring site.

The most recent three (3) years of data available is shown on Table 2-3 and identifies the number of days ambient air quality standards were exceeded for the study area, which is considered to be representative of the local air quality at the Project site (9) (13). Additionally, data for SO₂ has been omitted as attainment is regularly met in the Salton Sea Basin and few monitoring stations measure SO₂ concentrations.

Criteria pollutants are pollutants that are regulated through the development of human health based and/or environmentally based criteria for setting permissible levels. Criteria pollutants, their typical sources, and effects are identified below:

- Carbon Monoxide (CO): Is a colorless, odorless gas produced by the incomplete combustion of carbon-containing fuels, such as gasoline or wood. CO concentrations tend to be the highest during the winter morning, when little to no wind and surface-based inversions trap the pollutant at ground levels. Because CO is emitted directly from internal combustion engines, unlike ozone, motor vehicles operating at slow speeds are the primary source of CO in the Basin. The highest ambient CO concentrations are generally found near congested transportation corridors and intersections.
- Sulfur Dioxide (SO₂): Is a colorless, extremely irritating gas or liquid. It enters the atmosphere as a pollutant mainly as a result of burning high sulfur-content fuel oils and coal and from chemical processes occurring at chemical plants and refineries. When SO₂ oxidizes in the atmosphere, it forms sulfates (SO₄). Collectively, these pollutants are referred to as sulfur oxides (SOX).

Nitrogen Oxides (Oxides of Nitrogen, or NO_x): Nitrogen oxides (NO_x) consist of nitric oxide (NO), nitrogen dioxide (NO₂) and nitrous oxide (N₂O) and are formed when nitrogen (N₂) combines with oxygen (O₂). Their lifespan in the atmosphere ranges from one to seven days for nitric oxide and nitrogen dioxide, to 170 years for nitrous oxide. Nitrogen oxides are typically created

during combustion processes, and are major contributors to smog formation and acid deposition. NO₂ is a criteria air pollutant, and may result in numerous adverse health effects; it absorbs blue light, resulting in a brownish-red cast to the atmosphere and reduced visibility. Of the seven types of nitrogen oxide compounds, NO₂ is the most abundant in the atmosphere. As ambient concentrations of NO₂ are related to traffic density, commuters in heavy traffic may be exposed to higher concentrations of NO₂ than those indicated by regional monitors.

- **Ozone (O₃):** Is a highly reactive and unstable gas that is formed when volatile organic compounds (VOCs) and nitrogen oxides (NO_x), both byproducts of internal combustion engine exhaust, undergo slow photochemical reactions in the presence of sunlight. Ozone concentrations are generally highest during the summer months when direct sunlight, light wind, and warm temperature conditions are favorable to the formation of this pollutant.
- **PM₁₀ (Particulate Matter less than 10 microns):** A major air pollutant consisting of tiny solid or liquid particles of soot, dust, smoke, fumes, and aerosols. The size of the particles (10 microns or smaller, about 0.0004 inches or less) allows them to easily enter the lungs where they may be deposited, resulting in adverse health effects. PM₁₀ also causes visibility reduction and is a criteria air pollutant.
- **PM_{2.5} (Particulate Matter less than 2.5 microns):** A similar air pollutant consisting of tiny solid or liquid particles which are 2.5 microns or smaller (which is often referred to as fine particles). These particles are formed in the atmosphere from primary gaseous emissions that include sulfates formed from SO₂ release from power plants and industrial facilities and nitrates that are formed from NO_x release from power plants, automobiles and other types of combustion sources. The chemical composition of fine particles highly depends on location, time of year, and weather conditions. PM_{2.5} is a criteria air pollutant.
- **Volatile Organic Compounds (VOC):** Volatile organic compounds are hydrocarbon compounds (any compound containing various combinations of hydrogen and carbon atoms) that exist in the ambient air. VOCs contribute to the formation of smog through atmospheric photochemical reactions and/or may be toxic. Compounds of carbon (also known as organic compounds) have different levels of reactivity; that is, they do not react at the same speed or do not form ozone to the same extent when exposed to photochemical processes. VOCs often have an odor, and some examples include gasoline, alcohol, and the solvents used in paints. Exceptions to the VOC designation include: carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate. VOCs are a criteria pollutant since they are a precursor to O₃, which is a criteria pollutant. The SCAQMD uses the terms VOC and ROG (see below) interchangeably.
- **Reactive Organic Gases (ROG):** Similar to VOC, Reactive Organic Gases (ROG) are also precursors in forming ozone and consist of compounds containing methane, ethane, propane, butane, and longer chain hydrocarbons, which are typically the result of some type of combustion/decomposition process. Smog is formed when ROG and nitrogen oxides react in the presence of sunlight. ROGs are a criteria pollutant since they are a precursor to O₃, which is a criteria pollutant. The SCAQMD uses the terms ROG and VOC (see previous) interchangeably.
- **Lead (Pb):** Lead is a heavy metal that is highly persistent in the environment. In the past, the primary source of lead in the air was emissions from vehicles burning leaded gasoline. As a result of the removal of lead from gasoline, there have been no violations at any of the SCAQMD's regular air monitoring stations since 1982. Currently, emissions of lead are largely limited to stationary sources such as lead smelters. It should be noted that the Project is not anticipated to generate a quantifiable amount of lead emissions. Lead is a criteria air pollutant.

TABLE 2-2: ATTAINMENT STATUS OF CRITERIA POLLUTANTS IN THE SALTON SEA AIR BASIN (SSAB)

Criteria Pollutant	State Designation	Federal Designation
Ozone - 1hour standard	Nonattainment	No Standard
Ozone - 8 hour standard	Nonattainment	Nonattainment
PM ₁₀	Nonattainment	Nonattainment
PM _{2.5}	Attainment	Unclassified/Attainment
Carbon Monoxide	Attainment	Unclassified/Attainment
Nitrogen Dioxide	Attainment	Unclassified/Attainment
Sulfur Dioxide	Attainment	Attainment
Lead ¹	Attainment	Unclassified/Attainment

Source: State/Federal designations were taken from <http://www.arb.ca.gov/design/adm/adm.htm>

Note: See Appendix 3.2 for a detailed map of State/National Area Designations within the Salton Sea Air Basin

¹ The Federal nonattainment designation for lead is only applicable towards the Los Angeles County portion of the SCAB.

TABLE 2-3: PROJECT AREA AIR QUALITY MONITORING SUMMARY 2011-2013

POLLUTANT	STANDARD	YEAR		
		2011	2012	2013
Ozone (O3)				
Maximum 1-Hour Concentration (ppm)		0.099	0.102	0.105
Maximum 8-Hour Concentration (ppm)		0.090	0.089	0.087
Number of Days Exceeding State 1-Hour Standard	> 0.09 ppm	3	2	--
Number of Days Exceeding State 8-Hour Standard	> 0.07 ppm	42	43	--
Number of Days Exceeding Federal 1-Hour Standard	> 0.12 ppm	0	0	0
Number of Days Exceeding Federal 8-Hour Standard	> 0.075 ppm	19	24	18
Number of Days Exceeding Health Advisory	≥ 0.15 ppm	0	0	0
Carbon Monoxide (CO)				
Maximum 1-Hour Concentration (ppm)		--	--	3.2
Maximum 8-Hour Concentration (ppm)		0.6	0.5	1.5
Number of Days Exceeding State 1-Hour Standard	> 20 ppm	--	--	0
Number of Days Exceeding Federal / State 8-Hour Standard	> 9.0 ppm	0	0	0
Number of Days Exceeding Federal 1-Hour Standard	> 35 ppm	--	--	0
Nitrogen Dioxide (NO2)				
Maximum 1-Hour Concentration (ppm)		0.045	0.045	0.052
Annual Arithmetic Mean Concentration (ppm)		0.008	0.039	--
Number of Days Exceeding State 1-Hour Standard	> 0.18 ppm	0	0	0
Particulate Matter ≤ 10 Microns (PM10)				
Maximum 24-Hour Concentration (µg/m3)		106	124	159
Number of Samples		119	121	60
Number of Samples Exceeding State Standard	> 50 µg/m3	3	7	--
Number of Samples Exceeding Federal Standard	> 150 µg/m3	0	0	1
Particulate Matter ≤ 2.5 Microns (PM2.5)				
Maximum 24-Hour Concentration (µg/m3)		35.4	20	14.7
Annual Arithmetic Mean (µg/m3)		7.2	7.6	6.7
Number of Samples Exceeding Federal 24-Hour Standard	> 35 µg/m3	0	0	0

-- = data not available from either SCAQMD or EPA

Health Effects of Air Pollutants

Ozone

Individuals exercising outdoors, children, and people with preexisting lung disease, such as asthma and chronic pulmonary lung disease, are considered to be the most susceptible subgroups for ozone effects. Short-term exposure (lasting for a few hours) to ozone at levels typically observed in Southern California can result in breathing pattern changes, reduction of breathing capacity, increased susceptibility to infections, inflammation of the lung tissue, and some immunological changes. Elevated ozone levels are associated with increased school absences. In recent years, a correlation between elevated ambient ozone levels and increases in daily hospital admission rates, as well as mortality, has also been reported. An increased risk for asthma has been found in children who participate in multiple sports and live in communities with high ozone levels.

Ozone exposure under exercising conditions is known to increase the severity of the responses described above. Animal studies suggest that exposure to a combination of pollutants that includes ozone may be more toxic than exposure to ozone alone. Although lung volume and resistance changes observed after a single exposure diminish with repeated exposures, biochemical and cellular changes appear to persist, which can lead to subsequent lung structural changes.

Carbon Monoxide

Individuals with a deficient blood supply to the heart are the most susceptible to the adverse effects of CO exposure. The effects observed include earlier onset of chest pain with exercise, and electrocardiograph changes indicative of decreased oxygen supply to the heart. Inhaled CO has no direct toxic effect on the lungs, but exerts its effect on tissues by interfering with oxygen transport and competing with oxygen to combine with hemoglobin present in the blood to form carboxyhemoglobin (COHb). Hence, conditions with an increased demand for oxygen supply can be adversely affected by exposure to CO. Individuals most at risk include fetuses, patients with diseases involving heart and blood vessels, and patients with chronic hypoxemia (oxygen deficiency) as seen at high altitudes.

Reduction in birth weight and impaired neurobehavioral development have been observed in animals chronically exposed to CO, resulting in COHb levels similar to those observed in smokers. Recent studies have found increased risks for adverse birth outcomes with exposure to elevated CO levels; these include pre-term births and heart abnormalities.

Particulate Matter

A consistent correlation between elevated ambient fine particulate matter (PM₁₀ and PM_{2.5}) levels and an increase in mortality rates, respiratory infections, number and severity of asthma attacks and the number of hospital admissions has been observed in different parts of the United States and various areas around the world. In recent years, some studies have reported an association between long-term exposure to air pollution dominated by fine particles and increased mortality, reduction in life-span, and an increased mortality from lung cancer.

Daily fluctuations in PM_{2.5} concentration levels have also been related to hospital admissions for acute respiratory conditions in children, to school and kindergarten absences, to a decrease in respiratory lung volumes in normal children, and to increased medication use in children and adults with asthma. Recent studies show lung function growth in children is reduced with longterm exposure to particulate matter.

The elderly, people with pre-existing respiratory or cardiovascular disease, and children appear to be more susceptible to the effects of high levels of PM₁₀ and PM_{2.5}.

Nitrogen Dioxide

Population-based studies suggest that an increase in acute respiratory illness, including infections and respiratory symptoms in children (not infants), is associated with long-term exposure to NO₂ at levels found in homes with gas stoves, which are higher than ambient levels found in Southern California. Increase in resistance to air flow and airway contraction is observed after short-term exposure to NO₂ in healthy subjects. Larger decreases in lung functions are observed in individuals with asthma or chronic obstructive pulmonary disease (e.g., chronic bronchitis, emphysema) than in healthy individuals, indicating a greater susceptibility of these sub-groups.

In animals, exposure to levels of NO₂ considerably higher than ambient concentrations results in increased susceptibility to infections, possibly due to the observed changes in cells involved in maintaining immune functions. The severity of lung tissue damage associated with high levels of ozone exposure increases when animals are exposed to a combination of ozone and NO₂.

Sulfur Dioxide

A few minutes of exposure to low levels of SO₂ can result in airway constriction in some asthmatics, all of whom are sensitive to its effects. In asthmatics, increase in resistance to air flow, as well as reduction in breathing capacity leading to severe breathing difficulties, are observed after acute exposure to SO₂. In contrast, healthy individuals do not exhibit similar acute responses even after exposure to higher concentrations of SO₂.

Animal studies suggest that despite SO₂ being a respiratory irritant, it does not cause substantial lung injury at ambient concentrations. However, very high levels of exposure can cause lung edema (fluid accumulation), lung tissue damage, and sloughing off of cells lining the respiratory tract.

Some population-based studies indicate that the mortality and morbidity effects associated with fine particles show a similar association with ambient SO₂ levels. In these studies, efforts to separate the effects of SO₂ from those of fine particles have not been successful. It is not clear whether the two pollutants act synergistically or one pollutant alone is the predominant factor.

Lead

Fetuses, infants, and children are more sensitive than others to the adverse effects of Pb exposure. Exposure to low levels of Pb can adversely affect the development and function of

the central nervous system, leading to learning disorders, distractibility, inability to follow simple commands, and lower intelligence quotient. In adults, increased Pb levels are associated with increased blood pressure.

Pb poisoning can cause anemia, lethargy, seizures, and death; although it appears that there are no direct effects of Pb on the respiratory system. Pb can be stored in the bone from early age environmental exposure, and elevated blood Pb levels can occur due to breakdown of bone tissue during pregnancy, hyperthyroidism (increased secretion of hormones from the thyroid gland) and osteoporosis (breakdown of bony tissue). Fetuses and breast-fed babies can be exposed to higher levels of Pb because of previous environmental Pb exposure of their mothers.

Odors

The science of odor as a health concern is still new. Merely identifying the hundreds of VOCs that cause odors poses a big challenge. Offensive odors can potentially affect human health in several ways. First, odorant compounds can irritate the eye, nose, and throat, which can reduce respiratory volume. Second, studies have shown that the VOCs that cause odors can stimulate sensory nerves to cause neurochemical changes that might influence health, for instance, by compromising the immune system. Finally, unpleasant odors can trigger memories or attitudes linked to unpleasant odors, causing cognitive and emotional effects such as stress.

2.5 REGULATORY BACKGROUND

2.5.1 FEDERAL REGULATIONS

The U.S. EPA is responsible for setting and enforcing the NAAQS for O₃, CO, NO_x, SO₂, PM₁₀, and lead (7). The U.S. EPA has jurisdiction over emissions sources that are under the authority of the federal government including aircraft, locomotives, and emissions sources outside state waters (Outer Continental Shelf). The U.S. EPA also establishes emission standards for vehicles sold in states other than California. Automobiles sold in California must meet the stricter emission requirements of the CARB.

The Federal Clean Air Act (CAA) was first enacted in 1955, and has been amended numerous times in subsequent years (1963, 1965, 1967, 1970, 1977, and 1990). The CAA establishes the federal air quality standards, the NAAQS, and specifies future dates for achieving compliance (14). The CAA also mandates that states submit and implement State Implementation Plans (SIPs) for local areas not meeting these standards. These plans must include pollution control measures that demonstrate how the standards will be met.

The 1990 amendments to the CAA that identify specific emission reduction goals for areas not meeting the NAAQS require a demonstration of reasonable further progress toward attainment and incorporate additional sanctions for failure to attain or to meet interim milestones. The sections of the CAA most directly applicable to the development of the Project site include Title I (Non-Attainment Provisions) and Title II (Mobile Source Provisions). Title I provisions were established with the goal of attaining the NAAQS for the following criteria pollutants O₃, NO₂, SO₂, PM₁₀, CO, PM_{2.5}, and lead. The NAAQS were amended in July 1997 to include an

additional standard for O₃ and to adopt a NAAQS for PM_{2.5}. Table 2-1 (previously presented) provides the NAAQS within the basin.

Mobile source emissions are regulated in accordance with Title II provisions. These provisions require the use of cleaner burning gasoline and other cleaner burning fuels such as methanol and natural gas. Automobile manufacturers are also required to reduce tailpipe emissions of hydrocarbons and nitrogen oxides (NO_x). NO_x is a collective term that includes all forms of nitrogen oxides (NO, NO₂, NO₃) which are emitted as byproducts of the combustion process.

2.5.2 CALIFORNIA REGULATIONS

The CARB, which became part of the California EPA in 1991, is responsible for ensuring implementation of the California Clean Air Act (AB 2595), responding to the federal CAA, and for regulating emissions from consumer products and motor vehicles. The California CAA mandates achievement of the maximum degree of emissions reductions possible from vehicular and other mobile sources in order to attain the state ambient air quality standards by the earliest practical date. The CARB established the CAAQS for all pollutants for which the federal government has NAAQS and, in addition, establishes standards for sulfates, visibility, hydrogen sulfide, and vinyl chloride. However at this time, hydrogen sulfide and vinyl chloride are not measured at any monitoring stations in the SSAB because they are not considered to be a regional air quality problem. Generally, the CAAQS are more stringent than the NAAQS (8)(7).

Local air quality management districts, such as the SCAQMD, regulate air emissions from commercial and light industrial facilities. All air pollution control districts have been formally designated as attainment or non-attainment for each CAAQS.

Serious non-attainment areas are required to prepare air quality management plans that include specified emission reduction strategies in an effort to meet clean air goals. These plans are required to include:

- Application of Best Available Retrofit Control Technology to existing sources;
- Developing control programs for area sources (e.g., architectural coatings and solvents) and indirect sources (e.g. motor vehicle use generated by residential and commercial development);
- A District permitting system designed to allow no net increase in emissions from any new or modified permitted sources of emissions;
- Implementing reasonably available transportation control measures and assuring a substantial reduction in growth rate of vehicle trips and miles traveled;
- Significant use of low emissions vehicles by fleet operators;
- Sufficient control strategies to achieve a five percent or more annual reduction in emissions or 15 percent or more in a period of three years for ROGs, NO_x, CO and PM₁₀. However, air basins may use alternative emission reduction strategy that achieves a reduction of less than five percent per year under certain circumstances.

2.5.3 AIR QUALITY MANAGEMENT PLANNING

Currently, the NAAQS and CAAQS are exceeded in most parts of the SSAB. In response, the SCAQMD has adopted a series of Air Quality Management Plans (AQMPs) to meet the state and

federal ambient air quality standards (15). AQMPs are updated regularly in order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy. A detailed discussion on the AQMP and Project consistency with the AQMP is provided in Section 3.8.

2.6 EXISTING PROJECT SITE AIR QUALITY CONDITIONS

Existing air quality conditions at the Project site would generally reflect ambient monitored conditions as presented previously at Table 2-3.

3 PROJECT AIR QUALITY IMPACT

3.1 INTRODUCTION

The Project has been evaluated to determine if it will violate an air quality standard or contribute to an existing or projected air quality violation. Additionally, the Project has been evaluated to determine if it will result in a cumulatively considerable net increase of a criteria pollutant for which the SSAB is non-attainment under an applicable federal or state ambient air quality standard. The significance of these potential impacts is described in the following section.

3.2 STANDARDS OF SIGNIFICANCE

The criteria used to determine the significance of potential Project-related air quality impacts are taken from the Initial Study Checklist in Appendix G of the State CEQA Guidelines (14 California Code of Regulations §§15000, et seq.). Based on these thresholds, a project would result in a significant impact related to air quality if it would (16):

- Conflict with or obstruct implementation of the applicable air quality plan.
- Violate any air quality standard or contribute to an existing or projected air quality violation.
- Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard (including releasing emissions, which exceed quantitative thresholds for ozone precursors).
- Expose sensitive receptors to substantial pollutant concentrations.
- Create objectionable odors affecting a substantial number of people.

Within the context of the above threshold considerations, and based on the SCAQMD's CEQA Air Quality Handbook (1993), a project's localized CO emissions impacts would be significant if they exceed the following California standards for localized CO concentrations (17):

- 1-hour CO standard of 20.0 parts per million (ppm)
- 8-hour CO standard of 9.0 ppm.

The SCAQMD has also developed regional and localized significance thresholds for other regulated pollutants, as summarized at Table 3-1 (18). The SCAQMD's CEQA Air Quality Significance Thresholds (March 2011) indicate that any projects in the SSAB with daily emissions that exceed any of the indicated thresholds should be considered as having an individually and cumulatively significant air quality impact.

TABLE 3-1: MAXIMUM DAILY EMISSIONS REGIONAL THRESHOLDS

Pollutant	Construction	Operations
Regional Thresholds		
NOx	100 lbs/day	55 lbs/day
VOC	75 lbs/day	55 lbs/day
PM10	150 lbs/day	150 lbs/day
PM2.5	55 lbs/day	55 lbs/day
Sox	150 lbs/day	150 lbs/day
CO	550 lbs/day	550 lbs/day
Lead	3 lbs/day	3 lbs/day
Localized Thresholds		
NOx	784.11 lbs/day	784.11 lbs/day
PM10	26,096.67 lbs/day	26,096.67 lbs/day
PM2.5	217.11 lbs/day	65.28 lbs/day
CO	107.89 lbs/day	26.11 lbs/day

3.3 PROJECT-RELATED SOURCES OF POTENTIAL IMPACT

Land uses such as the Project affect air quality through construction-source and operational-source emissions.

On October 2, 2013, the SCAQMD in conjunction with the California Air Pollution Control Officers Association (CAPCOA) released the latest version of the California Emissions Estimator Model™ (CalEEMod™) v2013.2.2. The purpose of this model is to calculate construction-source and operational-source criteria pollutant (NO_x, VOC, PM₁₀, PM_{2.5}, SO_x, and CO) and greenhouse gas (GHG) emissions from direct and indirect sources; and quantify applicable air quality and GHG reductions achieved from mitigation measures (19). Accordingly, the latest version of CalEEMod™ has been used for this Project to determine construction and operational air quality emissions. Output from the model runs for both construction and operational activity are provided in Appendix 3.1.

3.4 CONSTRUCTION EMISSIONS

Construction activities associated with the Project will result in emissions of CO, VOCs, NO_x, SO_x, PM₁₀, and PM_{2.5}. Construction related emissions are expected from the following construction activities:

- Grading
- Building Construction
- Painting (Architectural Coatings)

- Paving (curb, gutter, flatwork, and parking lot)
- Construction Workers Commuting

Construction is expected to commence in January 2015 and will last through July 2015. Construction duration by phase is shown on Table 3-2. The construction schedule utilized in the analysis represents a “worst-case” analysis scenario should construction occur any time after the respective dates since emission factors for construction decrease as the analysis year increases. The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per CEQA guidelines. Site specific construction fleet may vary due to specific project needs at the time of construction. The duration of construction activity was developed in consultation with the applicant while assuming a summer 2015 opening year. Associated equipment was estimated based on CalEEMod defaults. Please refer to specific detailed modeling inputs/outputs contained in Appendix 3.1 of this Analysis. A detailed summary of construction equipment assumptions by phase is provided at Table 3-3. It should be noted that the construction equipment estimates provided at Table 3-3 represent a “worst-case” (i.e. overestimation) of actual construction equipment that will likely be used during construction activities.

Dust is typically a major concern during rough grading activities. Because such emissions are not amenable to collection and discharge through a controlled source, they are called “fugitive emissions”. Fugitive dust emissions rates vary as a function of many parameters (soil silt, soil moisture, wind speed, area disturbed, number of vehicles, depth of disturbance or excavation, etc.). CalEEMod was utilized to calculate fugitive dust emissions resulting from this phase of activity.

Construction emissions for construction worker vehicles traveling to and from the Project site, as well as vendor trips (construction materials delivered to the Project site) were estimated based on CalEEMod defaults.

TABLE 3-2: CONSTRUCTION DURATION

Phase	Duration (working days)
Grading	4
Building Construction	120
Architectural Coatings	100
Paving	20

TABLE 3-3: CONSTRUCTION EQUIPMENT ASSUMPTIONS

Activity	Equipment	Number	Hours Per Day
Grading	Graders	1	8
	Water Trucks	1	8
	Rubber Tired Dozers	1	8
	Tractors/Loaders/Backhoes	2	8
Building Construction	Cranes	1	8
	Forklifts	2	8
	Generator Sets	1	8
	Tractors/Loaders/Backhoes	2	8
	Welders	3	8
Architectural Coatings	Air Compressors	1	8
Paving	Cement and Mortar Mixers	1	8
	Pavers	1	8
	Paving equipment	1	8
	Rollers	1	8
	Tractors/Loaders/Backhoes	2	8

3.4.1 CONSTRUCTION EMISSIONS SUMMARY

Impacts Without BACMs and Regulatory Requirements

The estimated maximum daily construction emissions without BACMs are summarized on Table 3-4. Detailed construction model outputs are presented in Appendix 3.1. Under the assumed scenarios, emissions resulting from the Project construction will not exceed any criteria pollutant thresholds established by the SCAQMD. It should be noted that the impacts without BACMs do not take credit for reductions achieved through standard regulatory requirements (SCAQMD's Rule 403). Therefore, a less than significant impact would occur without the application of BACMs and standard regulatory requirements.

TABLE 3-4: EMISSIONS SUMMARY OF OVERALL CONSTRUCTION (WITHOUT BACMS)

Year	Emissions (pounds per day)					
	VOC	NOx	CO	SOx	PM10	PM2.5
2015	14.62	40.93	26.46	0.04	8.90	5.43
Maximum Daily Emissions	14.62	40.93	26.46	0.04	8.90	5.43
SCAQMD Regional Threshold	75	100	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO

Impacts With BACMs and Regulatory Requirements

The estimated maximum daily construction emissions with BACMs are summarized on Table 3-5. Detailed construction model outputs are presented in Appendix 3.1. Under the assumed scenarios, emissions resulting from the Project construction will be further reduced with implementation of BACMs and standard regulatory requirements (SCAQMD’s Rule 403).

TABLE 3-5: EMISSIONS SUMMARY OF OVERALL CONSTRUCTION (WITH BACMS)

Year	Emissions (pounds per day)					
	VOC	NOx	CO	SOx	PM10	PM2.5
2015	14.62	40.93	26.46	0.04	4.90	3.37
Maximum Daily Emissions	14.62	40.93	26.46	0.04	4.90	3.37
SCAQMD Regional Threshold	75	100	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO

3.5 OPERATIONAL EMISSIONS

Operational activities associated with the proposed Project will result in emissions of ROG, NOX, CO, SOX, PM10, and PM2.5. Operational emissions would be expected from the following primary sources:

- Area Source Emissions
- Energy Source Emissions
- Mobile Source Emissions

3.5.1 AREA SOURCE EMISSIONS

Architectural Coatings

Over a period of time the buildings that are part of this Project will be subject to emissions resulting from the evaporation of solvents contained in paints, varnishes, primers, and other surface coatings as part of Project maintenance. The emissions associated with architectural coatings were calculated using CalEEMod.

Consumer Products

Consumer products include, but are not limited to detergents, cleaning compounds, polishes, personal care products, and lawn and garden products. Many of these products contain organic compounds which when released in the atmosphere can react to form ozone and other photochemically reactive pollutants. The emissions associated with use of consumer products were calculated based on defaults provided within CalEEMod.

Landscape Maintenance Equipment

Landscape maintenance equipment would generate emissions from fuel combustion and evaporation of unburned fuel. Equipment in this category would include lawnmowers, shredders/grinders, blowers, trimmers, chain saws, and hedge trimmers used to maintain the landscaping of the Project. The emissions associated with landscape maintenance equipment were calculated based on assumptions provided in CalEEMod.

3.5.2 ENERGY SOURCE EMISSIONS

Combustion Emissions Associated with Natural Gas and Electricity

Electricity and natural gas are used by almost every project. Criteria pollutant emissions are emitted through the generation of electricity and consumption of natural gas. However, because electrical generating facilities for the Project area are located either outside the region (state) or offset through the use of pollution credits (RECLAIM) for generation within the SSAB, criteria pollutant emissions from offsite generation of electricity is generally excluded from the evaluation of significance and only natural gas use is considered. The emissions associated with natural gas use were calculated using CalEEMod.

3.5.3 MOBILE SOURCE EMISSIONS

Vehicles

Project operational (vehicular) impacts are dependent on both overall daily vehicle trip generation and the effect of the Project on peak hour traffic volumes and traffic operations in the vicinity of the Project. The Project related operational air quality impacts derive primarily from vehicle trips generated by the Project. Trip characteristics available from the Double Date Trip Generation Evaluation were utilized in this analysis (Urban Crossroads, 2014) (20).

Fugitive Dust Related to Vehicular Travel

Vehicles traveling on paved roads would be a source of fugitive emissions due to the generation of road dust inclusive of tire wear particulates. The emissions estimates for travel on paved roads were calculated using CalEEMod.

3.5.4 OPERATIONAL EMISSIONS SUMMARY

Operational-source emissions are summarized on Table 3-6. As shown, Project operational-source emissions would not exceed applicable SCAQMD regional thresholds of significance. Therefore, a less than significant impact would occur and no mitigation is required.

TABLE 3-6: SUMMARY OF PEAK OPERATIONAL EMISSIONS

Operational Activities – Summer Scenario	Emissions (pounds per day)					
	VOC	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
Area Source	1.75	1.30e-4	0.01	--	5.00e-5	5.00e-5
Energy Source	3.65e-5	0.03	0.03	2.00e-4	2.52e-3	2.2e-3
Mobile	0.57	4.39	7.07	0.02	1.36	0.42
Maximum Daily Emissions	2.32	4.42	7.12	0.02	1.36	0.42
SCAQMD Regional Threshold	55	55	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO

Operational Activities – Winter Scenario	Emissions (pounds per day)					
	VOC	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
Area Source	1.75	1.30e-4	0.01	--	5.00e-5	5.00e-5
Energy Source	3.65e-5	0.03	0.03	2.00e-4	2.52e-3	2.2e-3
Mobile	0.57	4.54	6.87	0.02	1.36	0.42
Maximum Daily Emissions	2.32	2.58	6.91	0.02	1.37	0.42
SCAQMD Regional Threshold	55	55	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO

3.6 LOCALIZED SIGNIFIANCE - CONSTRUCTION ACTIVITY

The analysis makes use of methodology included in the SCAQMD *Final Localized Significance Threshold Methodology* (Methodology)(21). As previously discussed, the SCAQMD has established that impacts to air quality are significant if there is a potential to contribute or cause localized exceedances of the federal and/or state ambient air quality standards (NAAQS/CAAQS). Collectively, these are referred to as Localized Significance Thresholds (LSTs).

The significance of localized emissions impacts depends on whether ambient levels in the vicinity of a given project are above or below State standards. In the case of CO and NO₂, if ambient levels are below the standards, a project is considered to have a significant impact if project emissions result in an exceedance of one or more of these standards. If ambient levels

already exceed a state or federal standard, then project emissions are considered significant if they increase ambient concentrations by a measurable amount. This would apply to PM₁₀ and PM_{2.5}; both of which are non-attainment pollutants.

The SCAQMD established LSTs in response to the SCAQMD Governing Board's Environmental Justice Initiative I-4. LSTs represent the maximum emissions from a project that will not cause or contribute to an exceedance of the most stringent applicable federal or state ambient air quality standard at the nearest residence or sensitive receptor. The SCAQMD states that lead agencies can use the LSTs as another indicator of significance in its air quality impact analyses.

LSTs were developed in response to environmental justice and health concerns raised by the public regarding exposure of individuals to criteria pollutants in local communities. To address the issue of localized significance, the SCAQMD adopted LSTs that show whether a project would cause or contribute to localized air quality impacts and thereby cause or contribute to potential localized adverse health effects. The analysis makes use of methodology included in the SCAQMD *Final Localized Significance Threshold Methodology* (Methodology) (SCAQMD, June 2003).

APPLICABILITY OF LSTs FOR THE PROJECT

For this Project, the appropriate Source Receptor Area (SRA) for the LST analysis is the Coachella Valley area (SRA 30). LSTs apply to carbon monoxide (CO), nitrogen dioxide (NO₂), particulate matter ≤ 10 microns (PM₁₀), and particulate matter ≤ 2.5 microns (PM_{2.5}).

The SCAQMD produced look-up tables for projects less than or equal to 5 acres in size. In order to determine the appropriate methodology for determining localized impacts that could occur as a result of Project-related construction, the following process is undertaken:

- CalEEMod is utilized to determine the maximum daily on-site emissions that will occur during construction activity.
- The SCAQMD's Fact Sheet for Applying CalEEMod to Localized Significance Thresholds (22) is used to determine the maximum site acreage that is actively disturbed based on the construction equipment fleet and equipment hours as estimated in CalEEMod.
- If the total acreage disturbed is less than or equal to five acres per day, then the SCAQMD's screening look-up tables are utilized to determine if a Project has the potential to result in a significant impact (the SCAQMD recommends that Projects exceeding the screening look-up tables undergo dispersion modeling to determine actual impacts). The look-up tables establish a maximum daily emissions threshold in pounds per day that can be compared to CalEEMod outputs.
- If the total acreage disturbed is greater than five acres per day, then the SCAQMD recommends dispersion modeling to be conducted to determine the actual pollutant concentrations for applicable LSTs in the air. In other words, the maximum daily on-site emissions as calculated in CalEEMod are modeled via air dispersion modeling to calculate the actual concentration in the air (e.g., parts per million or micrograms per cubic meter) in order to determine if any applicable thresholds are exceeded.

EMISSIONS CONSIDERED

SCAQMD’s Methodology clearly states that “off-site mobile emissions from the Project should NOT be included in the emissions compared to LSTs (23).” Therefore, for purposes of the construction LST analysis only emissions included in the CalEEMod “on-site” emissions outputs were considered.

MAXIMUM DAILY DISTURBED-ACREAGE

The Project is estimated to have a construction fleet mix similar to the SCAQMD construction equipment guidance for a 4.0 acre site. To ensure consistency with LST modeling of construction-source emissions, the SCAQMD construction equipment guidance for a 4.0 acre site is utilized in this analysis and the proposed Project will result in a maximum of 4.0 acres disturbed during peak construction activity on any given day. Site specific construction fleet may vary due to specific project needs at the time of construction.

Receptors

The nearest sensitive receptor land use is located ~450 meters west of the project boundary across Tyler Street.

Impacts Without BACMs

Without BACMs, emissions during construction activity will not exceed the SCAQMD’s localized significance threshold for any of the applicable emissions. Table 3-7 identifies the localized impacts at the nearest receptor location in the vicinity of the Project. It should be noted that the impacts do not take credit for reductions achieved through standard regulatory requirements (SCAQMD’s Rule 403).

TABLE 3-7: LOCALIZED SIGNIFICANCE SUMMARY CONSTRUCTION (WITHOUT BACMS)

On-Site Grading Emissions	Emissions (pounds per day)			
	NO _x	CO	PM ₁₀	PM _{2.5}
Maximum Daily Emissions	40.86	23.97	8.75	5.39
SCAQMD Localized Threshold	784.11	26,096.67	217.11	107.89
Threshold Exceeded?	NO	NO	NO	NO

Impacts With BACMs

After implementation of BACMs, emissions during construction activity will be further reduced. Table 3-8 identifies the localized impacts at the nearest receptor location in the vicinity of the Project with implementation of BACMs.

TABLE 3-8: LOCALIZED SIGNIFICANCE SUMMARY CONSTRUCTION (WITH BACMS)

On-Site Grading Emissions	Emissions (pounds per day)			
	NO _x	CO	PM ₁₀	PM _{2.5}
Maximum Daily Emissions	40.86	23.97	4.75	3.34
SCAQMD Localized Threshold	784.11	26,096.67	217.11	107.89
Threshold Exceeded?	NO	NO	NO	NO

3.7 LOCALIZED SIGNIFICANCE – LONG-TERM OPERATIONAL ACTIVITY

Table 3-9 shows the calculated emissions for the Project's operational activities compared with the applicable LSTs. The LST analysis includes on-site sources only; however, the CalEEMod™ outputs do not separate on-site and off-site emissions from mobile sources. In an effort to establish a maximum potential impact scenario for analytic purposes, the emissions shown on Table 3-9 represent all on-site Project-related stationary (area) sources and five percent (5%) of the Project-related mobile sources. Considering that the weighted trip length used in CalEEMod™ for the Project is approximately 16.6 miles, 5% of this total would represent an on-site travel distance for each car and truck of approximately 1 mile or 5,280 feet, thus the 5% assumption is conservative and would tend to overstate the actual impact. Modeling based on these assumptions demonstrates that even within broad encompassing parameters, Project operational-source emissions would not exceed applicable LSTs. The operational LSTs are located ~450 meters west of the project boundary across Tyler Street (within SRA 30).

TABLE 3-9: LOCALIZED SIGNIFICANCE SUMMARY OPERATIONS

Operational Activity	Emissions (pounds per day)			
	NO _x	CO	PM ₁₀	PM _{2.5}
Maximum Daily Emissions	3.00	19.51	1.09	0.62
SCAQMD Localized Threshold	784.11	26,096.67	65.28	26.11
Threshold Exceeded?	NO	NO	NO	NO

As shown on Table 3-9, operational emissions would not exceed the LST thresholds for the nearest sensitive receptor. Therefore, the Project will have a less than significant localized impact during operational activity.

3.8 CO "HOT SPOT" ANALYSIS

As discussed below, the Project would not result in potentially adverse CO concentrations or "hot spots." Further, detailed modeling of Project-specific carbon monoxide (CO) "hot spots" is not needed to reach this conclusion.

It has long been recognized that adverse localized CO concentrations ("hot spots") are caused by vehicular emissions, primarily when idling at congested intersections. In response, vehicle emissions standards have become increasingly stringent in the last twenty years. Currently, the

allowable CO emissions standard in California is a maximum of 3.4 grams/mile for passenger cars (there are requirements for certain vehicles that are more stringent). With the turnover of older vehicles, introduction of cleaner fuels, and implementation of increasingly sophisticated and efficient emissions control technologies, CO concentrations in the Project vicinity have steadily declined, as indicated by historical emissions data presented previously at Table 2-3.

A CO “hotspot” would occur if an exceedance of the state one-hour standard of 20 ppm or the eight-hour standard of 9 ppm were to occur. At the time of the 1993 Handbook, the SCAB was designated nonattainment under the California AAQS and National AAQS for CO (17). As identified within SCAQMD's 2003 AQMP and the 1992 Federal Attainment Plan for Carbon Monoxide (1992 CO Plan), peak carbon monoxide concentrations in the SCAB were a result of unusual meteorological and topographical conditions and not a result of congestion at a particular intersection (24). To establish a more accurate record of baseline CO concentrations affecting the SCAB, a CO “hot spot” analysis was conducted in 2003 for four busy intersections in Los Angeles at the peak morning and afternoon time periods. This hot spot analysis did not predict any violation of CO standards. It can therefore be reasonably concluded that projects (such as the proposed Double Date Project) that are not subject to the extremes in vehicle volumes and vehicle congestion that was evidenced in the 2003 Los Angeles hot spot analysis would similarly not create or result in CO hot spots. Similar considerations are also employed by other Air Districts when evaluating potential CO concentration impacts. More specifically, the Bay Area Air Quality Management District (BAAQMD) concludes that under existing and future vehicle emission rates, a given project would have to increase traffic volumes at a single intersection by more than 44,000 vehicles per hour—or 24,000 vehicles per hour where vertical and/or horizontal air does not mix—in order to generate a significant CO impact (25). The proposed Project considered herein would not produce the volume of traffic required to generate a CO hotspot either in the context of the 2003 Los Angeles hot spot study, or based on representative BAAQMD CO threshold considerations. Therefore, CO hotspots are not an environmental impact of concern for the proposed Project. Localized air quality impacts related to mobile-source emissions would therefore be less than significant.

3.9 AIR QUALITY MANAGEMENT PLANNING

The Project site is located within the SSAB, which is characterized by relatively poor air quality. The SCAQMD has jurisdiction over an approximately 10,743 square-mile area consisting of the four-county Basin and the Los Angeles County and Riverside County portions of what use to be referred to as the Southeast Desert Air Basin. In these areas, the SCAQMD is principally responsible for air pollution control, and works directly with the Southern California Association of Governments (SCAG), county transportation commissions, local governments, as well as state and federal agencies to reduce emissions from stationary, mobile, and indirect sources to meet state and federal ambient air quality standards.

Currently, these state and federal air quality standards are exceeded in most parts of the Basin. In response, the SCAQMD has adopted a series of Air Quality Management Plans (AQMPs) to meet the state and federal ambient air quality standards. AQMPs are updated regularly in

order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy.

The Final 2012 AQMP was adopted by the AQMD Governing Board on December 7, 2012 (15). The 2012 AQMP incorporates the latest scientific and technological information and planning assumptions, including the 2012 Regional Transportation Plan/Sustainable Communities Strategy and updated emission inventory methodologies for various source categories.

Similar to the 2007 AQMP, the 2012 AQMP was based on assumptions provided by both CARB and SCAG in the latest available EMFAC model for the most recent motor vehicle and demographics information, respectively. The air quality levels projected in the 2012 AQMP are based on several assumptions. For example, the 2012 AQMP has assumed that development associated with general plans, specific plans, residential projects, and wastewater facilities will be constructed in accordance with population growth projections identified by SCAG in its 2012 RTP. The 2012 AQMP also has assumed that such development projects will implement strategies to reduce emissions generated during the construction and operational phases of development. The Project's consistency with the 2012 AQMP is discussed as follows:

Criteria for determining consistency with the AQMP are defined in Chapter 12, Section 12.2 and Section 12.3 of the SCAQMD's CEQA Air Quality Handbook (1993) (17). These indicators are discussed below:

- Consistency Criterion No. 1: The proposed Project will not result in an increase in the frequency or severity of existing air quality violations or cause or contribute to new violations, or delay the timely attainment of air quality standards or the interim emissions reductions specified in the AQMP.

Construction Impacts

The violations that Consistency Criterion No. 1 refers to are the CAAQS and NAAQS. CAAQS and NAAQS violations would occur if localized significance thresholds (LSTs) were exceeded. As evaluated as part of the Project LST analysis (previously presented), the Project's localized construction-source emissions without/with BACMs will not exceed applicable LSTs, and a less than significant impact is expected.

Operational Impacts

The Project LST analysis demonstrates that Project operational-source emissions would not exceed applicable LSTs, and are therefore less-than-significant.

On the basis of the preceding discussion, the Project is determined to be consistent with the first criterion.

- Consistency Criterion No. 2: The Project will not exceed the assumptions in the AQMP based on the years of Project build-out phase.

Construction and Operational Impacts

The 2012 Air Quality Management Plan (AQMP) demonstrates that the applicable ambient air quality standards can be achieved within the timeframes required under federal law. Growth

projections from local general plans adopted by cities in the district are provided to the Southern California Association of Governments (SCAG), which develops regional growth forecasts, which are then used to develop future air quality forecasts for the AQMP. The site is in the M-H (Heavy Industrial) zoning district, per the City's Official Zoning Map. The proposed project is a permitted use in the M-H zone and shall comply with the development standards of the M-S (Manufacturing Service) zone, as specified for projects that develop in the M-H district. Development is consistent with the growth projections in the City of Coachella General Plan and is considered to be consistent with the AQMP.

AQMP Consistency Conclusion

The Project would not result in or cause NAAQS or CAAQS violations. The Project's proposed land use designation for the subject site does not materially affect the uses allowed or their development intensities as reflected in the adopted City General Plan. The Project is therefore considered to be consistent with the AQMP.

3.10 POTENTIAL IMPACTS TO SENSITIVE RECEPTORS

The potential impact of Project-generated air pollutant emissions at sensitive receptors has also been considered. Sensitive receptors can include uses such as long term health care facilities, rehabilitation centers, and retirement homes. Residences, schools, playgrounds, child care centers, and athletic facilities can also be considered as sensitive receptors.

Results of the LST analysis indicate that the Project will not exceed the SCAQMD localized significance thresholds during construction (without/with BACMs). Therefore sensitive receptors would not be subject to a significant air quality impact during Project construction.

Results of the LST analysis indicate that the Project will not exceed the SCAQMD localized significance thresholds during operational activity. The proposed Project would not result in a CO "hotspot" as a result of Project related traffic during ongoing operations, nor would the Project result in a significant adverse health impact as discussed in Section 3.8. Thus a less than significant impact to sensitive receptors during operational activity is expected.

3.11 ODORS

The potential for the Project to generate objectionable odors has also been considered. Land uses generally associated with odor complaints include:

- Agricultural uses (livestock and farming)
- Wastewater treatment plants
- Food processing plants
- Chemical plants
- Composting operations
- Refineries
- Landfills

- Dairies
- Fiberglass molding facilities

The Project does not contain land uses typically associated with emitting objectionable odors. Potential odor sources associated with the proposed Project may result from construction equipment exhaust and the application of asphalt and architectural coatings during construction activities, and the temporary storage of typical solid waste (refuse) associated with the proposed Project's (long-term operational) uses. Standard construction requirements would minimize odor impacts from construction. The construction odor emissions would be temporary, short-term, and intermittent in nature and would cease upon completion of the respective phase of construction and is thus considered less than significant. It is expected that Project-generated refuse would be stored in covered containers and removed at regular intervals in compliance with the City's solid waste regulations. The storage of dates would not typically generate objectionable odors. There is no chemical processing proposed on-site for the dates and the freezing and drying of dates would occur in closed building structures. Furthermore, the nearest sensitive land use is located several hundred meters from the Project site and would not be adversely impacted by any objectionable odors. The proposed Project would also be required to comply with SCAQMD Rule 402 to prevent occurrences of public nuisances. Therefore, odors associated with the proposed Project construction and operations would be less than significant and no mitigation is required.

3.12 CUMULATIVE IMPACTS

The Project area is designated as an extreme non-attainment area for ozone, and a non-attainment area for PM₁₀ and PM_{2.5}.

The SCAQMD has recognized that there is typically insufficient information to quantitatively evaluate the cumulative contributions of multiple projects because each project applicant has no control over nearby projects. Nevertheless, the potential cumulative impacts from the Project and other projects are discussed below.

Related projects could contribute to an existing or projected air quality exceedance because the Basin is currently nonattainment for ozone, PM₁₀, and PM_{2.5}. With regard to determining the significance of the contribution from the Project, the SCAQMD recommends that any given project's potential contribution to cumulative impacts should be assessed using the same significance criteria as for project-specific impacts. Therefore, this analysis assumes that individual projects that do not generate operational or construction emissions that exceed the SCAQMD's recommended daily thresholds for project-specific impacts would also not cause a commutatively considerable increase in emissions for those pollutants for which the Basin is in nonattainment, and, therefore, would not be considered to have a significant, adverse air quality impact. Alternatively, individual project-related construction and operational emissions that exceed SCAQMD thresholds for project-specific impacts would be considered cumulatively considerable. As previously noted, the Project will not exceed the applicable SCAQMD regional threshold for construction and operational-source emissions. As such, the Project will result in a cumulatively less than significant impact.

4 REFERENCES

1. **South Coast Air Quality Management District.** RULE 402. Nuisance. [Online] May 7, 1976. [Cited: November 13, 2013.] <http://www.aqmd.gov/rules/reg/reg04/r402.pdf>.
2. —. RULE 1113. Architectural Coatings. [Online] <http://www.aqmd.gov/rules/reg/reg11/r1113.pdf>.
3. —. RULE 431.2. Sulfur Content of Liquid Fuels. [Online] <http://www.aqmd.gov/rules/siprules/sr431-2.pdf>.
4. —. RULE 403. Fugitive Dust. [Online] <http://www.aqmd.gov/rules/reg/reg04/r403.pdf>.
5. —. RULE 1186. PM10 Emissions From Paved and Unpaved Roads, and Livestock Operations. [Online] <http://www.aqmd.gov/rules/reg/reg11/r1186.pdf>.
6. **State of California.** California Code of Regulations. *Department of Industrial Relations.* [Online] <http://www.dir.ca.gov/dlse/ccr.htm>.
7. **Environmental Protection Agency.** National Ambient Air Quality Standards (NAAQS). [Online] 1990. [Cited: November 13, 2013.] <http://www.epa.gov/air/criteria.html>.
8. **Air Resources Board.** California Ambient Air Quality Standards (CAAQS). [Online] 2009. [Cited: November 13, 2013.] <http://www.arb.ca.gov/research/aaqs/caaqs/caaqs.htm>.
9. **Environmental Protection Agency.** Monitor Values Report. [Online] [Cited: November 13, 2013.] http://www.epa.gov/airdata/ad_rep_mon.html.
10. **Air Resources Board.** Air Quality Standards and Area Designations. [Online] 2012. [Cited: November 13, 2013.] <http://www.arb.ca.gov/desig/desig.htm>.
11. **Environmental Protection Agency.** Currently Designated Nonattainment Areas for All Criteria Pollutants. [Online] 2013. <http://www.epa.gov/oaqps001/greenbk/ancl.html>.
12. **South Coast Air Quality Management District.** *Air Quality Reporting.* [pdf] Diamond Bar : Sierra Wade Associates, 1999.
13. **Air Resources Board.** [Online] [Cited: November 13, 2013.] <http://www.arb.ca.gov/adam/select8/sc8start.php>.
14. **Environmental Protection Agency.** Air Pollution and the Clean Air Act. [Online] [Cited: November 13, 2013.] <http://www.epa.gov/air/caa/>.
15. **South Coast Air Quality Management District.** 2012 Air Quality Management Plan (AQMP). [Online] 2012. [Cited: November 13, 2013.] <http://www.aqmd.gov/aqmp/2012aqmp/draft/index.html>.
16. **California Environmental Quality Act.** Checklist. [Online] [Cited: November 13, 2013.] http://ceres.ca.gov/ceqa/guidelines/Appendix_G.html.
17. **South coast Air Quality Management District.** CEQA Air Quality Handbook (1993). [Online] 1993. [Cited: November 13, 2013.] <http://www.aqmd.gov/ceqa/oldhdbk.html>.
18. **South Coast Air Quality Management District.** Greenhouse Gases (GHG) CEQA Significance Thresholds. [Online] [Cited: November 13, 2013.] <http://www.aqmd.gov/ceqa/handbook/GHG/GHG.html>.
19. —. California Emissions Estimator Model. [Online] 2013. [Cited: November 13, 2013.] <http://www.caleemod.com/>.
20. **Urban Crossroads.** *Double Date Trip Generation Evaluation.* Irvine : s.n., 2014.

21. **South Coast Air Quality Management District.** RULE 1113. Architectural Coatings. [Online] <http://www.aqmd.gov/rules/reg/reg11/r1113.pdf>.
22. —. Fact Sheet for Applying CalEEMod to Localized Significance Thresholds. [Online] [Cited: December 9, 2013.] <http://aqmd.gov/ceqa/handbook/LST/CalEEModguidance.pdf>.
23. —. *Localized Significance Thresholds Methodology*. s.l. : South Coast Air Quality Management District, 2003.
24. —. 2003 Air Quality Management Plan. [Online] 2003. <http://www.aqmd.gov/aqmp/aqmd03aqmp.htm>.
25. **Bay Area Air Quality Management District.** [Online] <http://www.baaqmd.gov/>.

5 CERTIFICATION

The contents of this air study report represent an accurate depiction of the environmental impacts associated with the proposed Double Date Project Project. The information contained in this air quality impact assessment report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at (949) 660-1994 ext. 217.

Haseeb Qureshi
Senior Associate
URBAN CROSSROADS, INC.
41 Corporate Park, Suite 300
Irvine, CA 92606
(949) 660-1994 x217
hqureshi@urbanxroads.com

EDUCATION

Master of Science in Environmental Studies
California State University, Fullerton • May, 2010

Bachelor of Arts in Environmental Analysis and Design
University of California, Irvine • June, 2006

PROFESSIONAL AFFILIATIONS

AEP – Association of Environmental Planners
AWMA – Air and Waste Management Association
ASTM – American Society for Testing and Materials

PROFESSIONAL CERTIFICATIONS

Environmental Site Assessment – American Society for Testing and Materials • June, 2013
Planned Communities and Urban Infill – Urban Land Institute • June, 2011
Indoor Air Quality and Industrial Hygiene – EMSL Analytical • April, 2008
Principles of Ambient Air Monitoring – California Air Resources Board • August, 2007
AB2588 Regulatory Standards – Trinity Consultants • November, 2006
Air Dispersion Modeling – Lakes Environmental • June, 2006

This page intentionally left blank

APPENDIX 3.1:
CALEEMOD EMISSIONS OUTPUTS

Double Date
Riverside-South Coast County, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Refrigerated Warehouse-No Rail	16.14	1000sqft	0.37	16,139.00	0
Unrefrigerated Warehouse-No Rail	22.77	1000sqft	0.52	22,767.00	0
Parking Lot	91.00	Space	0.82	36,400.00	0

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	13			Operational Year	2015
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	551.29	CH4 Intensity (lb/MWhr)	0.029	N2O Intensity (lb/MWhr)	0.006

1.3 User Entered Comments & Non-Default Data

Project Characteristics - Source: CPUC GHG Calculator version 3c, worksheet tab "CO2 Allocations," cells AH/AQ 35-44.

Land Use - land uses and amounts were provided by the applicant

Construction Phase - architectural coatings was adjusted to happen concurrently with building activity. Once a building is fully constructed it will be painted

Off-road Equipment - hours/day were adjusted to reflect and 8 our work day

Off-road Equipment - Generally reflective of SCAQMD's recommendation for a Project site with a 4-acre disturbance. Hours/day were adjusted to reflect and 8 our work day

Off-road Equipment - Generally reflective of SCAQMD's recommendation for a Project site with a 4-acre disturbance. This list would be overly conservative because the site would only have a 3-acre disturbance area.

Off-road Equipment - Generally reflective of SCAQMD's recommendation for a Project site with a 4-acre disturbance. hours/day were adjusted to reflect and 8 our work day

Grading -

Vehicle Trips - TR based on the ITE

Vehicle Emission Factors - fleet mix based on the City of Fontana Trip Generation Study for LU 150

Vehicle Emission Factors - fleet mix based on the City of Fontana Trip Generation Study for LU 150

Vehicle Emission Factors - fleet mix based on the City of Fontana Trip Generation Study for LU 150

Energy Use - Title-24 Electricity Energy Intensity and Title-24 Natural Gas Energy Intensity were adjusted by 21.8% and 16.8% respectively, to reflect 2013 Title 24 requirements. Source: Impact Analysis California's 2013 Building Energy Efficiency Standards (CEC 2013)

Construction Off-road Equipment Mitigation -

Architectural Coating -

Area Coating -

Table Name	Column Name	Default Value	New Value
tblConstructionPhase	NumDays	10.00	100.00
tblConstructionPhase	NumDays	200.00	120.00
tblConstructionPhase	NumDays	10.00	20.00
tblConstructionPhase	PhaseEndDate	11/10/2015	7/17/2015
tblConstructionPhase	PhaseEndDate	8/14/2015	7/21/2015
tblConstructionPhase	PhaseStartDate	6/24/2015	3/1/2015
tblConstructionPhase	PhaseStartDate	7/18/2015	6/24/2015
tblEnergyUse	T24E	2.53	1.98

tblEnergyUse	T24E	1.07	0.84
tblEnergyUse	T24NG	6.68	5.56
tblEnergyUse	T24NG	1.64	1.36
tblLandUse	LandUseSquareFeet	16,140.00	16,139.00
tblLandUse	LandUseSquareFeet	22,770.00	22,767.00
tblOffRoadEquipment	HorsePower	400.00	189.00
tblOffRoadEquipment	LoadFactor	0.38	0.50
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	2.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	2.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	2.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	2.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	0.00	1.00
tblOffRoadEquipment	PhaseName		Grading
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblProjectCharacteristics	CO2IntensityFactor	630.89	551.29
tblProjectCharacteristics	OperationalYear	2014	2015
tblVehicleEF	HHD	0.04	0.12
tblVehicleEF	HHD	0.04	0.12
tblVehicleEF	HHD	0.04	0.12

tblVehicleEF	LDA	0.46	0.80
tblVehicleEF	LDA	0.46	0.80
tblVehicleEF	LDA	0.46	0.80
tblVehicleEF	LDT1	0.07	0.00
tblVehicleEF	LDT1	0.07	0.00
tblVehicleEF	LDT1	0.07	0.00
tblVehicleEF	LDT2	0.18	0.00
tblVehicleEF	LDT2	0.18	0.00
tblVehicleEF	LDT2	0.18	0.00
tblVehicleEF	LHD1	0.04	0.03
tblVehicleEF	LHD1	0.04	0.03
tblVehicleEF	LHD1	0.04	0.03
tblVehicleEF	LHD2	7.4040e-003	0.00
tblVehicleEF	LHD2	7.4040e-003	0.00
tblVehicleEF	LHD2	7.4040e-003	0.00
tblVehicleEF	MCY	6.4360e-003	0.00
tblVehicleEF	MCY	6.4360e-003	0.00
tblVehicleEF	MCY	6.4360e-003	0.00
tblVehicleEF	MDV	0.17	0.00
tblVehicleEF	MDV	0.17	0.00
tblVehicleEF	MDV	0.17	0.00
tblVehicleEF	MH	3.2300e-003	0.00
tblVehicleEF	MH	3.2300e-003	0.00
tblVehicleEF	MH	3.2300e-003	0.00
tblVehicleEF	MHD	0.01	0.05
tblVehicleEF	MHD	0.01	0.05
tblVehicleEF	MHD	0.01	0.05
tblVehicleEF	OBUS	9.8500e-004	0.00

tblVehicleEF	OBUS	9.8500e-004	0.00
tblVehicleEF	OBUS	9.8500e-004	0.00
tblVehicleEF	SBUS	9.0500e-004	0.00
tblVehicleEF	SBUS	9.0500e-004	0.00
tblVehicleEF	SBUS	9.0500e-004	0.00
tblVehicleEF	UBUS	1.0630e-003	0.00
tblVehicleEF	UBUS	1.0630e-003	0.00
tblVehicleEF	UBUS	1.0630e-003	0.00
tblVehicleTrips	ST_TR	2.59	3.56
tblVehicleTrips	ST_TR	2.59	3.56
tblVehicleTrips	SU_TR	2.59	3.56
tblVehicleTrips	SU_TR	2.59	3.56
tblVehicleTrips	WD_TR	2.59	3.56
tblVehicleTrips	WD_TR	2.59	3.56

2.0 Emissions Summary

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302
Energy	3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.6000e-004	7.3000e-004	40.0564
Mobile	0.5741	4.3857	7.0742	0.0201	1.2775	0.0846	1.3621	0.3427	0.0778	0.4204		1,859.2437	1,859.2437	0.0414		1,860.1121
Total	2.3241	4.4190	7.1158	0.0203	1.2775	0.0872	1.3647	0.3427	0.0804	0.4230		1,899.0862	1,899.0862	0.0422	7.3000e-004	1,900.1986

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302
Energy	3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.6000e-004	7.3000e-004	40.0564
Mobile	0.5741	4.3857	7.0742	0.0201	1.2775	0.0846	1.3621	0.3427	0.0778	0.4204		1,859.2437	1,859.2437	0.0414		1,860.1121
Total	2.3241	4.4190	7.1158	0.0203	1.2775	0.0872	1.3647	0.3427	0.0804	0.4230		1,899.0862	1,899.0862	0.0422	7.3000e-004	1,900.1986

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Grading	Grading	1/1/2015	1/6/2015	5	4	
2	Building Construction	Building Construction	1/7/2015	6/23/2015	5	120	
3	Architectural Coating	Architectural Coating	3/1/2015	7/17/2015	5	100	
4	Paving	Paving	6/24/2015	7/21/2015	5	20	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 2

Acres of Paving: 0

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 59,999; Non-Residential Outdoor: 20,000 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Grading	Graders	1	8.00	174	0.41
Grading	Off-Highway Trucks	1	8.00	189	0.50
Grading	Rubber Tired Dozers	1	8.00	255	0.40
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	8.00	226	0.29
Building Construction	Forklifts	2	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Welders	3	8.00	46	0.45
Architectural Coating	Air Compressors	1	8.00	78	0.48
Paving	Cement and Mortar Mixers	1	8.00	9	0.56
Paving	Pavers	1	8.00	125	0.42
Paving	Paving Equipment	1	8.00	130	0.36
Paving	Rollers	1	8.00	80	0.38
Paving	Tractors/Loaders/Backhoes	2	8.00	97	0.37

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Grading	5	13.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	32.00	12.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	6.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area

3.2 Grading - 2015

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					6.5523	0.0000	6.5523	3.3675	0.0000	3.3675			0.0000			0.0000
Off-Road	3.8447	40.8564	23.9749	0.0294		2.1975	2.1975		2.0217	2.0217		3,092.335 1	3,092.335 1	0.9232		3,111.722 1
Total	3.8447	40.8564	23.9749	0.0294	6.5523	2.1975	8.7498	3.3675	2.0217	5.3892		3,092.335 1	3,092.335 1	0.9232		3,111.722 1

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0554	0.0657	0.8204	1.7400e-003	0.1453	9.5000e-004	0.1463	0.0385	8.7000e-004	0.0394		149.6991	149.6991	6.8100e-003		149.8421
Total	0.0554	0.0657	0.8204	1.7400e-003	0.1453	9.5000e-004	0.1463	0.0385	8.7000e-004	0.0394		149.6991	149.6991	6.8100e-003		149.8421

3.2 Grading - 2015

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					2.5554	0.0000	2.5554	1.3133	0.0000	1.3133			0.0000			0.0000
Off-Road	3.8447	40.8564	23.9749	0.0294		2.1975	2.1975		2.0217	2.0217	0.0000	3,092.335 1	3,092.335 1	0.9232		3,111.722 1
Total	3.8447	40.8564	23.9749	0.0294	2.5554	2.1975	4.7529	1.3133	2.0217	3.3350	0.0000	3,092.335 1	3,092.335 1	0.9232		3,111.722 1

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0554	0.0657	0.8204	1.7400e-003	0.1453	9.5000e-004	0.1463	0.0385	8.7000e-004	0.0394		149.6991	149.6991	6.8100e-003		149.8421
Total	0.0554	0.0657	0.8204	1.7400e-003	0.1453	9.5000e-004	0.1463	0.0385	8.7000e-004	0.0394		149.6991	149.6991	6.8100e-003		149.8421

3.3 Building Construction - 2015

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	4.5376	30.6472	20.3975	0.0292		2.1390	2.1390		2.0360	2.0360		2,813.5310	2,813.5310	0.7004		2,828.2391
Total	4.5376	30.6472	20.3975	0.0292		2.1390	2.1390		2.0360	2.0360		2,813.5310	2,813.5310	0.7004		2,828.2391

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.1053	1.1454	1.1331	2.5300e-003	0.0755	0.0231	0.0986	0.0216	0.0213	0.0428		256.5224	256.5224	1.8500e-003		256.5611
Worker	0.1363	0.1616	2.0196	4.2900e-003	0.3577	2.3300e-003	0.3600	0.0949	2.1400e-003	0.0970		368.4901	368.4901	0.0168		368.8421
Total	0.2416	1.3071	3.1526	6.8200e-003	0.4332	0.0255	0.4587	0.1164	0.0234	0.1398		625.0124	625.0124	0.0186		625.4032

3.3 Building Construction - 2015

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	4.5376	30.6472	20.3975	0.0292		2.1390	2.1390		2.0360	2.0360	0.0000	2,813.5310	2,813.5310	0.7004		2,828.2391
Total	4.5376	30.6472	20.3975	0.0292		2.1390	2.1390		2.0360	2.0360	0.0000	2,813.5310	2,813.5310	0.7004		2,828.2391

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.1053	1.1454	1.1331	2.5300e-003	0.0755	0.0231	0.0986	0.0216	0.0213	0.0428		256.5224	256.5224	1.8500e-003		256.5611
Worker	0.1363	0.1616	2.0196	4.2900e-003	0.3577	2.3300e-003	0.3600	0.0949	2.1400e-003	0.0970		368.4901	368.4901	0.0168		368.8421
Total	0.2416	1.3071	3.1526	6.8200e-003	0.4332	0.0255	0.4587	0.1164	0.0234	0.1398		625.0124	625.0124	0.0186		625.4032

3.4 Architectural Coating - 2015

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	9.2699					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.5421	3.4271	2.5357	3.9600e-003		0.2945	0.2945		0.2945	0.2945		375.2641	375.2641	0.0489		376.2902
Total	9.8120	3.4271	2.5357	3.9600e-003		0.2945	0.2945		0.2945	0.2945		375.2641	375.2641	0.0489		376.2902

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0256	0.0303	0.3787	8.0000e-004	0.0671	4.4000e-004	0.0675	0.0178	4.0000e-004	0.0182		69.0919	69.0919	3.1400e-003		69.1579
Total	0.0256	0.0303	0.3787	8.0000e-004	0.0671	4.4000e-004	0.0675	0.0178	4.0000e-004	0.0182		69.0919	69.0919	3.1400e-003		69.1579

3.4 Architectural Coating - 2015

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	9.2699					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.5421	3.4271	2.5357	3.9600e-003		0.2945	0.2945		0.2945	0.2945	0.0000	375.2641	375.2641	0.0489		376.2902
Total	9.8120	3.4271	2.5357	3.9600e-003		0.2945	0.2945		0.2945	0.2945	0.0000	375.2641	375.2641	0.0489		376.2902

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0256	0.0303	0.3787	8.0000e-004	0.0671	4.4000e-004	0.0675	0.0178	4.0000e-004	0.0182		69.0919	69.0919	3.1400e-003		69.1579
Total	0.0256	0.0303	0.3787	8.0000e-004	0.0671	4.4000e-004	0.0675	0.0178	4.0000e-004	0.0182		69.0919	69.0919	3.1400e-003		69.1579

3.5 Paving - 2015**Unmitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.9383	19.8227	12.6486	0.0181		1.2599	1.2599		1.1603	1.1603		1,875.4409	1,875.4409	0.5501		1,886.9922
Paving	0.1074					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.0457	19.8227	12.6486	0.0181		1.2599	1.2599		1.1603	1.1603		1,875.4409	1,875.4409	0.5501		1,886.9922

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0639	0.0758	0.9467	2.0100e-003	0.1677	1.0900e-003	0.1688	0.0445	1.0000e-003	0.0455		172.7297	172.7297	7.8600e-003		172.8947
Total	0.0639	0.0758	0.9467	2.0100e-003	0.1677	1.0900e-003	0.1688	0.0445	1.0000e-003	0.0455		172.7297	172.7297	7.8600e-003		172.8947

3.5 Paving - 2015

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.9383	19.8227	12.6486	0.0181		1.2599	1.2599		1.1603	1.1603	0.0000	1,875.4409	1,875.4409	0.5501		1,886.9922
Paving	0.1074					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.0457	19.8227	12.6486	0.0181		1.2599	1.2599		1.1603	1.1603	0.0000	1,875.4409	1,875.4409	0.5501		1,886.9922

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0639	0.0758	0.9467	2.0100e-003	0.1677	1.0900e-003	0.1688	0.0445	1.0000e-003	0.0455		172.7297	172.7297	7.8600e-003		172.8947
Total	0.0639	0.0758	0.9467	2.0100e-003	0.1677	1.0900e-003	0.1688	0.0445	1.0000e-003	0.0455		172.7297	172.7297	7.8600e-003		172.8947

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	0.5741	4.3857	7.0742	0.0201	1.2775	0.0846	1.3621	0.3427	0.0778	0.4204		1,859,243 7	1,859,243 7	0.0414		1,860,112 1
Unmitigated	0.5741	4.3857	7.0742	0.0201	1.2775	0.0846	1.3621	0.3427	0.0778	0.4204		1,859,243 7	1,859,243 7	0.0414		1,860,112 1

4.2 Trip Summary Information

Land Use	Average Daily Trip Rate			Unmitigated	Mitigated
	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Parking Lot	0.00	0.00	0.00		
Refrigerated Warehouse-No Rail	57.46	57.46	57.46	246,250	246,250
Unrefrigerated Warehouse-No Rail	81.06	81.06	81.06	347,405	347,405
Total	138.52	138.52	138.52	593,656	593,656

4.3 Trip Type Information

Land Use	Miles			Trip %			Trip Purpose %		
	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Parking Lot	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Refrigerated Warehouse-No	16.60	8.40	6.90	59.00	0.00	41.00	92	5	3
Unrefrigerated Warehouse-No	16.60	8.40	6.90	59.00	0.00	41.00	92	5	3

LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
0.795700	0.000000	0.000000	0.000000	0.034600	0.000000	0.046400	0.123300	0.000000	0.000000	0.000000	0.000000	0.000000

5.0 Energy Detail

5.1 Fleet Mix

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
NaturalGas Mitigated	3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.6000e-004	7.3000e-004	40.0564
NaturalGas Unmitigated	3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.6000e-004	7.3000e-004	40.0564

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Refrigerated Warehouse-No Fuel	246.728	2.6600e-003	0.0242	0.0203	1.5000e-004		1.8400e-003	1.8400e-003		1.8400e-003	1.8400e-003		29.0268	29.0268	5.6000e-004	5.3000e-004	29.2034
Unrefrigerated Warehouse-No Fuel	91.6918	9.9000e-004	8.9900e-003	7.5500e-003	5.0000e-005		6.8000e-004	6.8000e-004		6.8000e-004	6.8000e-004		10.7873	10.7873	2.1000e-004	2.0000e-004	10.8529
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.7000e-004	7.3000e-004	40.0564

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Refrigerated Warehouse-No Fuel	0.246728	2.6600e-003	0.0242	0.0203	1.5000e-004		1.8400e-003	1.8400e-003		1.8400e-003	1.8400e-003		29.0268	29.0268	5.6000e-004	5.3000e-004	29.2034
Unrefrigerated Warehouse-No Fuel	0.0916918	9.9000e-004	8.9900e-003	7.5500e-003	5.0000e-005		6.8000e-004	6.8000e-004		6.8000e-004	6.8000e-004		10.7873	10.7873	2.1000e-004	2.0000e-004	10.8529
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.7000e-004	7.3000e-004	40.0564

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302
Unmitigated	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.2540					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.4911					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	1.3600e-003	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302
Total	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.2540					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.4911					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	1.3600e-003	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302
Total	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302

7.0 Water Detail

7.1 Mitigation Measures Water

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

10.0 Vegetation

Double Date
Riverside-South Coast County, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Refrigerated Warehouse-No Rail	16.14	1000sqft	0.37	16,139.00	0
Unrefrigerated Warehouse-No Rail	22.77	1000sqft	0.52	22,767.00	0
Parking Lot	91.00	Space	0.82	36,400.00	0

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	13			Operational Year	2015
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	551.29	CH4 Intensity (lb/MWhr)	0.029	N2O Intensity (lb/MWhr)	0.006

1.3 User Entered Comments & Non-Default Data

Project Characteristics - Source: CPUC GHG Calculator version 3c, worksheet tab "CO2 Allocations," cells AH/AQ 35-44.

Land Use - land uses and amounts were provided by the applicant

Construction Phase - architectural coatings was adjusted to happen concurrently with building activity. Once a building is fully constructed it will be painted

Off-road Equipment - hours/day were adjusted to reflect and 8 our work day

Off-road Equipment - Generally reflective of SCAQMD's recommendation for a Project site with a 4-acre disturbance. Hours/day were adjusted to reflect and 8 our work day

Off-road Equipment - Generally reflective of SCAQMD's recommendation for a Project site with a 4-acre disturbance. This list would be overly conservative because the site would only have a 3-acre disturbance area.

Off-road Equipment - Generally reflective of SCAQMD's recommendation for a Project site with a 4-acre disturbance. hours/day were adjusted to reflect and 8 our work day

Grading -

Vehicle Trips - TR based on the ITE

Vehicle Emission Factors - fleet mix based on the City of Fontana Trip Generation Study for LU 150

Vehicle Emission Factors - fleet mix based on the City of Fontana Trip Generation Study for LU 150

Vehicle Emission Factors - fleet mix based on the City of Fontana Trip Generation Study for LU 150

Energy Use - Title-24 Electricity Energy Intensity and Title-24 Natural Gas Energy Intensity were adjusted by 21.8% and 16.8% respectively, to reflect 2013 Title 24 requirements. Source: Impact Analysis California's 2013 Building Energy Efficiency Standards (CEC 2013)

Construction Off-road Equipment Mitigation -

Architectural Coating -

Area Coating -

Table Name	Column Name	Default Value	New Value
tblConstructionPhase	NumDays	10.00	100.00
tblConstructionPhase	NumDays	200.00	120.00
tblConstructionPhase	NumDays	10.00	20.00
tblConstructionPhase	PhaseEndDate	11/10/2015	7/17/2015
tblConstructionPhase	PhaseEndDate	8/14/2015	7/21/2015
tblConstructionPhase	PhaseStartDate	6/24/2015	3/1/2015
tblConstructionPhase	PhaseStartDate	7/18/2015	6/24/2015
tblEnergyUse	T24E	2.53	1.98

tblEnergyUse	T24E	1.07	0.84
tblEnergyUse	T24NG	6.68	5.56
tblEnergyUse	T24NG	1.64	1.36
tblLandUse	LandUseSquareFeet	16,140.00	16,139.00
tblLandUse	LandUseSquareFeet	22,770.00	22,767.00
tblOffRoadEquipment	HorsePower	400.00	189.00
tblOffRoadEquipment	LoadFactor	0.38	0.50
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	2.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	2.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	2.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	2.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	0.00	1.00
tblOffRoadEquipment	PhaseName		Grading
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblProjectCharacteristics	CO2IntensityFactor	630.89	551.29
tblProjectCharacteristics	OperationalYear	2014	2015
tblVehicleEF	HHD	0.04	0.12
tblVehicleEF	HHD	0.04	0.12
tblVehicleEF	HHD	0.04	0.12

tblVehicleEF	LDA	0.46	0.80
tblVehicleEF	LDA	0.46	0.80
tblVehicleEF	LDA	0.46	0.80
tblVehicleEF	LDT1	0.07	0.00
tblVehicleEF	LDT1	0.07	0.00
tblVehicleEF	LDT1	0.07	0.00
tblVehicleEF	LDT2	0.18	0.00
tblVehicleEF	LDT2	0.18	0.00
tblVehicleEF	LDT2	0.18	0.00
tblVehicleEF	LHD1	0.04	0.03
tblVehicleEF	LHD1	0.04	0.03
tblVehicleEF	LHD1	0.04	0.03
tblVehicleEF	LHD2	7.4040e-003	0.00
tblVehicleEF	LHD2	7.4040e-003	0.00
tblVehicleEF	LHD2	7.4040e-003	0.00
tblVehicleEF	MCY	6.4360e-003	0.00
tblVehicleEF	MCY	6.4360e-003	0.00
tblVehicleEF	MCY	6.4360e-003	0.00
tblVehicleEF	MDV	0.17	0.00
tblVehicleEF	MDV	0.17	0.00
tblVehicleEF	MDV	0.17	0.00
tblVehicleEF	MH	3.2300e-003	0.00
tblVehicleEF	MH	3.2300e-003	0.00
tblVehicleEF	MH	3.2300e-003	0.00
tblVehicleEF	MHD	0.01	0.05
tblVehicleEF	MHD	0.01	0.05
tblVehicleEF	MHD	0.01	0.05
tblVehicleEF	OBUS	9.8500e-004	0.00

tblVehicleEF	OBUS	9.8500e-004	0.00
tblVehicleEF	OBUS	9.8500e-004	0.00
tblVehicleEF	SBUS	9.0500e-004	0.00
tblVehicleEF	SBUS	9.0500e-004	0.00
tblVehicleEF	SBUS	9.0500e-004	0.00
tblVehicleEF	UBUS	1.0630e-003	0.00
tblVehicleEF	UBUS	1.0630e-003	0.00
tblVehicleEF	UBUS	1.0630e-003	0.00
tblVehicleTrips	ST_TR	2.59	3.56
tblVehicleTrips	ST_TR	2.59	3.56
tblVehicleTrips	SU_TR	2.59	3.56
tblVehicleTrips	SU_TR	2.59	3.56
tblVehicleTrips	WD_TR	2.59	3.56
tblVehicleTrips	WD_TR	2.59	3.56

2.0 Emissions Summary

2.2 Overall Operational**Unmitigated Operational**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302
Energy	3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.6000e-004	7.3000e-004	40.0564
Mobile	0.5724	4.5446	6.8659	0.0191	1.2775	0.0851	1.3626	0.3427	0.0782	0.4209		1,777.3068	1,777.3068	0.0415		1,778.1781
Total	2.3224	4.5779	6.9075	0.0193	1.2775	0.0876	1.3651	0.3427	0.0808	0.4234		1,817.1492	1,817.1492	0.0423	7.3000e-004	1,818.2647

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302
Energy	3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.6000e-004	7.3000e-004	40.0564
Mobile	0.5724	4.5446	6.8659	0.0191	1.2775	0.0851	1.3626	0.3427	0.0782	0.4209		1,777.3068	1,777.3068	0.0415		1,778.1781
Total	2.3224	4.5779	6.9075	0.0193	1.2775	0.0876	1.3651	0.3427	0.0808	0.4234		1,817.1492	1,817.1492	0.0423	7.3000e-004	1,818.2647

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Grading	Grading	1/1/2015	1/6/2015	5	4	
2	Building Construction	Building Construction	1/7/2015	6/23/2015	5	120	
3	Architectural Coating	Architectural Coating	3/1/2015	7/17/2015	5	100	
4	Paving	Paving	6/24/2015	7/21/2015	5	20	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 2

Acres of Paving: 0

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 59,999; Non-Residential Outdoor: 20,000 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Grading	Graders	1	8.00	174	0.41
Grading	Off-Highway Trucks	1	8.00	189	0.50
Grading	Rubber Tired Dozers	1	8.00	255	0.40
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	8.00	226	0.29
Building Construction	Forklifts	2	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Welders	3	8.00	46	0.45
Architectural Coating	Air Compressors	1	8.00	78	0.48
Paving	Cement and Mortar Mixers	1	8.00	9	0.56
Paving	Pavers	1	8.00	125	0.42
Paving	Paving Equipment	1	8.00	130	0.36
Paving	Rollers	1	8.00	80	0.38
Paving	Tractors/Loaders/Backhoes	2	8.00	97	0.37

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Grading	5	13.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	32.00	12.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	6.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area

3.2 Grading - 2015

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					6.5523	0.0000	6.5523	3.3675	0.0000	3.3675			0.0000			0.0000
Off-Road	3.8447	40.8564	23.9749	0.0294		2.1975	2.1975		2.0217	2.0217		3,092.335 1	3,092.335 1	0.9232		3,111.722 1
Total	3.8447	40.8564	23.9749	0.0294	6.5523	2.1975	8.7498	3.3675	2.0217	5.3892		3,092.335 1	3,092.335 1	0.9232		3,111.722 1

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0529	0.0700	0.7088	1.5900e-003	0.1453	9.5000e-004	0.1463	0.0385	8.7000e-004	0.0394		136.8165	136.8165	6.8100e-003		136.9595
Total	0.0529	0.0700	0.7088	1.5900e-003	0.1453	9.5000e-004	0.1463	0.0385	8.7000e-004	0.0394		136.8165	136.8165	6.8100e-003		136.9595

3.2 Grading - 2015

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					2.5554	0.0000	2.5554	1.3133	0.0000	1.3133			0.0000			0.0000
Off-Road	3.8447	40.8564	23.9749	0.0294		2.1975	2.1975		2.0217	2.0217	0.0000	3,092.335 1	3,092.335 1	0.9232		3,111.722 1
Total	3.8447	40.8564	23.9749	0.0294	2.5554	2.1975	4.7529	1.3133	2.0217	3.3350	0.0000	3,092.335 1	3,092.335 1	0.9232		3,111.722 1

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0529	0.0700	0.7088	1.5900e-003	0.1453	9.5000e-004	0.1463	0.0385	8.7000e-004	0.0394		136.8165	136.8165	6.8100e-003		136.9595
Total	0.0529	0.0700	0.7088	1.5900e-003	0.1453	9.5000e-004	0.1463	0.0385	8.7000e-004	0.0394		136.8165	136.8165	6.8100e-003		136.9595

3.3 Building Construction - 2015

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
Category	lb/day										lb/day						
Off-Road	4.5376	30.6472	20.3975	0.0292		2.1390	2.1390		2.0360	2.0360		2,813.5310	2,813.5310	0.7004			2,828.2391
Total	4.5376	30.6472	20.3975	0.0292		2.1390	2.1390		2.0360	2.0360		2,813.5310	2,813.5310	0.7004			2,828.2391

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
Category	lb/day										lb/day						
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000			0.0000
Vendor	0.1122	1.1753	1.2760	2.5100e-003	0.0755	0.0234	0.0989	0.0216	0.0215	0.0431		254.3139	254.3139	1.9000e-003			254.3539
Worker	0.1303	0.1723	1.7447	3.9200e-003	0.3577	2.3300e-003	0.3600	0.0949	2.1400e-003	0.0970		336.7791	336.7791	0.0168			337.1311
Total	0.2425	1.3476	3.0208	6.4300e-003	0.4332	0.0257	0.4589	0.1164	0.0236	0.1401		591.0930	591.0930	0.0187			591.4850

3.3 Building Construction - 2015

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	4.5376	30.6472	20.3975	0.0292		2.1390	2.1390		2.0360	2.0360	0.0000	2,813.5310	2,813.5310	0.7004		2,828.2391
Total	4.5376	30.6472	20.3975	0.0292		2.1390	2.1390		2.0360	2.0360	0.0000	2,813.5310	2,813.5310	0.7004		2,828.2391

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.1122	1.1753	1.2760	2.5100e-003	0.0755	0.0234	0.0989	0.0216	0.0215	0.0431		254.3139	254.3139	1.9000e-003		254.3539
Worker	0.1303	0.1723	1.7447	3.9200e-003	0.3577	2.3300e-003	0.3600	0.0949	2.1400e-003	0.0970		336.7791	336.7791	0.0168		337.1311
Total	0.2425	1.3476	3.0208	6.4300e-003	0.4332	0.0257	0.4589	0.1164	0.0236	0.1401		591.0930	591.0930	0.0187		591.4850

3.4 Architectural Coating - 2015

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
Category	lb/day										lb/day						
Archit. Coating	9.2699					0.0000	0.0000		0.0000	0.0000			0.0000				0.0000
Off-Road	0.5421	3.4271	2.5357	3.9600e-003		0.2945	0.2945		0.2945	0.2945		375.2641	375.2641	0.0489			376.2902
Total	9.8120	3.4271	2.5357	3.9600e-003		0.2945	0.2945		0.2945	0.2945		375.2641	375.2641	0.0489			376.2902

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
Category	lb/day										lb/day						
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000			0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000			0.0000
Worker	0.0244	0.0323	0.3271	7.3000e-004	0.0671	4.4000e-004	0.0675	0.0178	4.0000e-004	0.0182		63.1461	63.1461	3.1400e-003			63.2121
Total	0.0244	0.0323	0.3271	7.3000e-004	0.0671	4.4000e-004	0.0675	0.0178	4.0000e-004	0.0182		63.1461	63.1461	3.1400e-003			63.2121

3.4 Architectural Coating - 2015

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	9.2699					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.5421	3.4271	2.5357	3.9600e-003		0.2945	0.2945		0.2945	0.2945	0.0000	375.2641	375.2641	0.0489		376.2902
Total	9.8120	3.4271	2.5357	3.9600e-003		0.2945	0.2945		0.2945	0.2945	0.0000	375.2641	375.2641	0.0489		376.2902

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0244	0.0323	0.3271	7.3000e-004	0.0671	4.4000e-004	0.0675	0.0178	4.0000e-004	0.0182		63.1461	63.1461	3.1400e-003		63.2121
Total	0.0244	0.0323	0.3271	7.3000e-004	0.0671	4.4000e-004	0.0675	0.0178	4.0000e-004	0.0182		63.1461	63.1461	3.1400e-003		63.2121

3.5 Paving - 2015**Unmitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.9383	19.8227	12.6486	0.0181		1.2599	1.2599		1.1603	1.1603		1,875.4409	1,875.4409	0.5501		1,886.9922
Paving	0.1074					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.0457	19.8227	12.6486	0.0181		1.2599	1.2599		1.1603	1.1603		1,875.4409	1,875.4409	0.5501		1,886.9922

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0611	0.0808	0.8178	1.8400e-003	0.1677	1.0900e-003	0.1688	0.0445	1.0000e-003	0.0455		157.8652	157.8652	7.8600e-003		158.0302
Total	0.0611	0.0808	0.8178	1.8400e-003	0.1677	1.0900e-003	0.1688	0.0445	1.0000e-003	0.0455		157.8652	157.8652	7.8600e-003		158.0302

3.5 Paving - 2015

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.9383	19.8227	12.6486	0.0181		1.2599	1.2599		1.1603	1.1603	0.0000	1,875.4409	1,875.4409	0.5501		1,886.9922
Paving	0.1074					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.0457	19.8227	12.6486	0.0181		1.2599	1.2599		1.1603	1.1603	0.0000	1,875.4409	1,875.4409	0.5501		1,886.9922

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0611	0.0808	0.8178	1.8400e-003	0.1677	1.0900e-003	0.1688	0.0445	1.0000e-003	0.0455		157.8652	157.8652	7.8600e-003		158.0302
Total	0.0611	0.0808	0.8178	1.8400e-003	0.1677	1.0900e-003	0.1688	0.0445	1.0000e-003	0.0455		157.8652	157.8652	7.8600e-003		158.0302

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	0.5724	4.5446	6.8659	0.0191	1.2775	0.0851	1.3626	0.3427	0.0782	0.4209		1,777.3068	1,777.3068	0.0415		1,778.1781
Unmitigated	0.5724	4.5446	6.8659	0.0191	1.2775	0.0851	1.3626	0.3427	0.0782	0.4209		1,777.3068	1,777.3068	0.0415		1,778.1781

4.2 Trip Summary Information

Land Use	Average Daily Trip Rate			Unmitigated	Mitigated
	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Parking Lot	0.00	0.00	0.00		
Refrigerated Warehouse-No Rail	57.46	57.46	57.46	246,250	246,250
Unrefrigerated Warehouse-No Rail	81.06	81.06	81.06	347,405	347,405
Total	138.52	138.52	138.52	593,656	593,656

4.3 Trip Type Information

Land Use	Miles			Trip %			Trip Purpose %		
	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Parking Lot	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Refrigerated Warehouse-No	16.60	8.40	6.90	59.00	0.00	41.00	92	5	3
Unrefrigerated Warehouse-No	16.60	8.40	6.90	59.00	0.00	41.00	92	5	3

LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
0.795700	0.000000	0.000000	0.000000	0.034600	0.000000	0.046400	0.123300	0.000000	0.000000	0.000000	0.000000	0.000000

5.0 Energy Detail

4.4 Fleet Mix

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
NaturalGas Mitigated	3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.6000e-004	7.3000e-004	40.0564
NaturalGas Unmitigated	3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.6000e-004	7.3000e-004	40.0564

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Refrigerated Warehouse-No Fuel	246.728	2.6600e-003	0.0242	0.0203	1.5000e-004		1.8400e-003	1.8400e-003		1.8400e-003	1.8400e-003		29.0268	29.0268	5.6000e-004	5.3000e-004	29.2034
Unrefrigerated Warehouse-No Fuel	91.6918	9.9000e-004	8.9900e-003	7.5500e-003	5.0000e-005		6.8000e-004	6.8000e-004		6.8000e-004	6.8000e-004		10.7873	10.7873	2.1000e-004	2.0000e-004	10.8529
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.7000e-004	7.3000e-004	40.0564

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Refrigerated Warehouse-No Fuel	0.246728	2.6600e-003	0.0242	0.0203	1.5000e-004		1.8400e-003	1.8400e-003		1.8400e-003	1.8400e-003		29.0268	29.0268	5.6000e-004	5.3000e-004	29.2034
Unrefrigerated Warehouse-No Fuel	0.0916918	9.9000e-004	8.9900e-003	7.5500e-003	5.0000e-005		6.8000e-004	6.8000e-004		6.8000e-004	6.8000e-004		10.7873	10.7873	2.1000e-004	2.0000e-004	10.8529
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		3.6500e-003	0.0332	0.0279	2.0000e-004		2.5200e-003	2.5200e-003		2.5200e-003	2.5200e-003		39.8141	39.8141	7.7000e-004	7.3000e-004	40.0564

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302
Unmitigated	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.2540					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.4911					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	1.3600e-003	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302
Total	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005		0.0302

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
SubCategory	lb/day										lb/day						
Architectural Coating	0.2540					0.0000	0.0000		0.0000	0.0000			0.0000				0.0000
Consumer Products	1.4911					0.0000	0.0000		0.0000	0.0000			0.0000				0.0000
Landscaping	1.3600e-003	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005			0.0302
Total	1.7464	1.3000e-004	0.0137	0.0000		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005		0.0284	0.0284	8.0000e-005			0.0302

7.0 Water Detail

7.1 Mitigation Measures Water

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

10.0 Vegetation

This page intentionally left blank

APPENDIX 3.2:

STATE/FEDERAL ATTAINMENT STATUS OF CRITERIA POLLUTANTS


2013 Area Designations for State Ambient Air Quality Standards OZONE




2013 Area Designations for State Ambient Air Quality Standards PM10



2013 Area Designations for State Ambient Air Quality Standards PM2.5

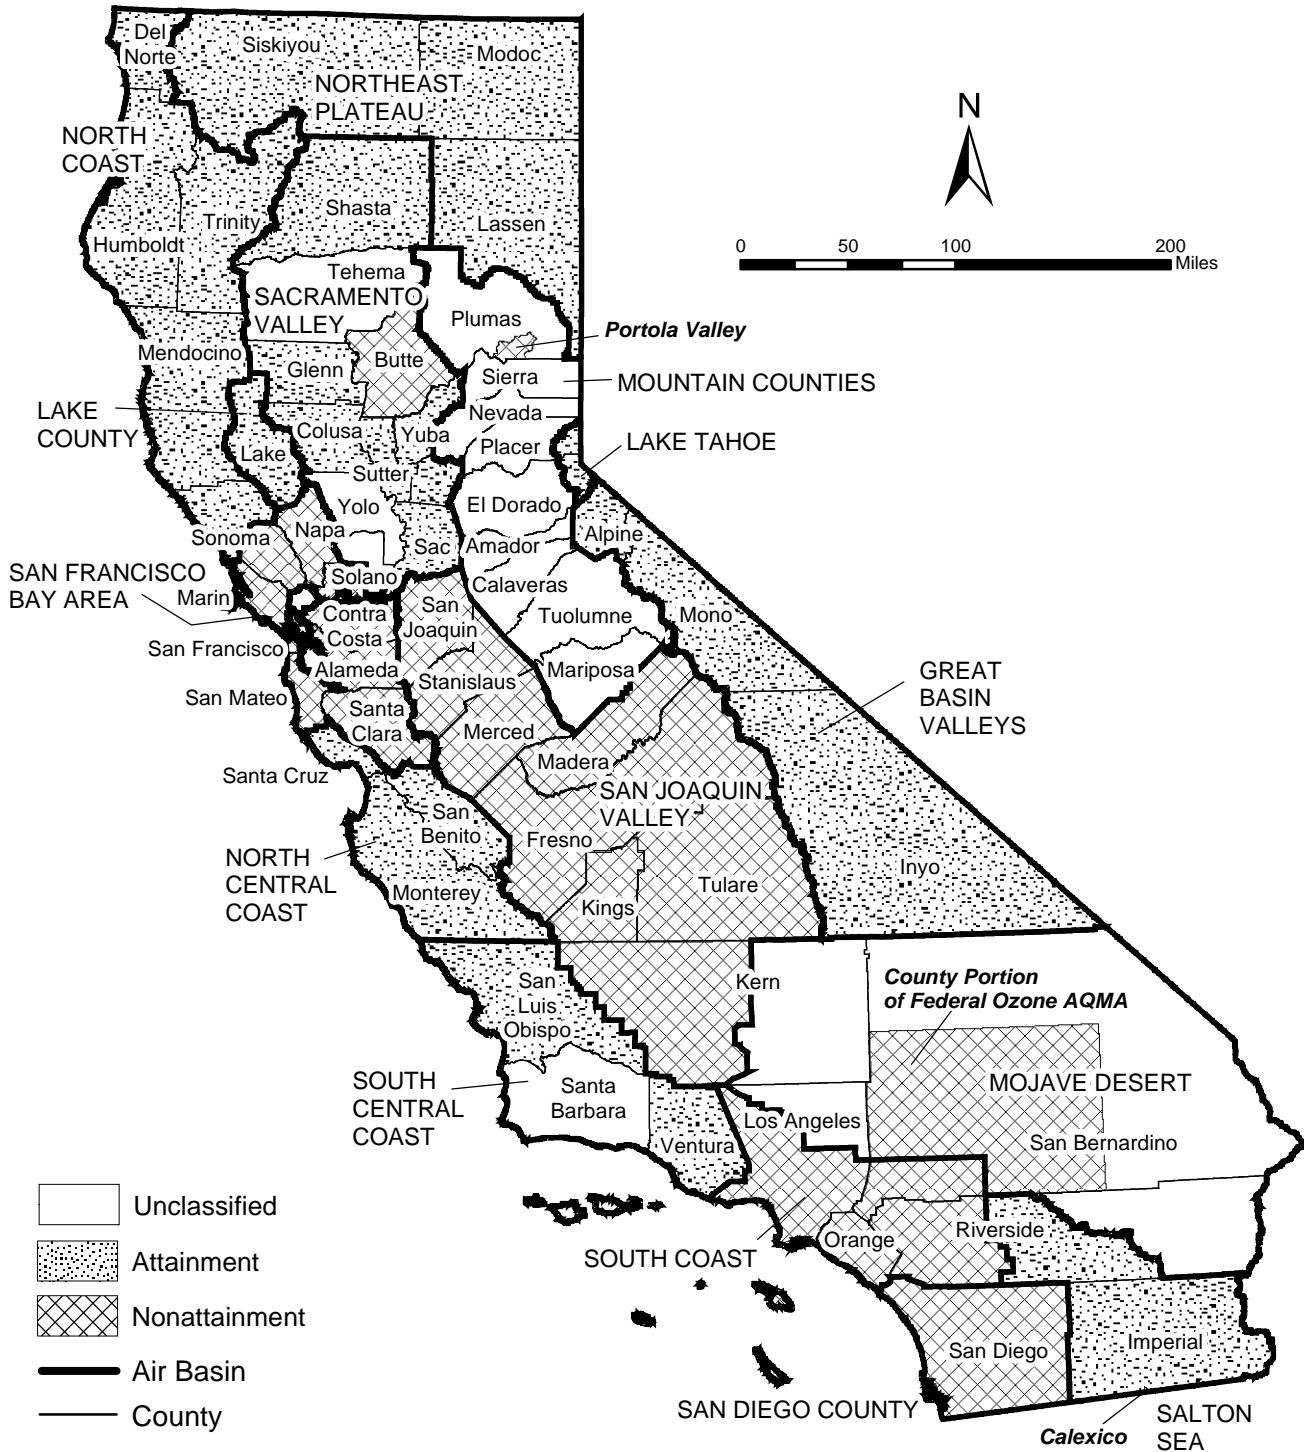

2013 Area Designations for State Ambient Air Quality Standards CARBON MONOXIDE

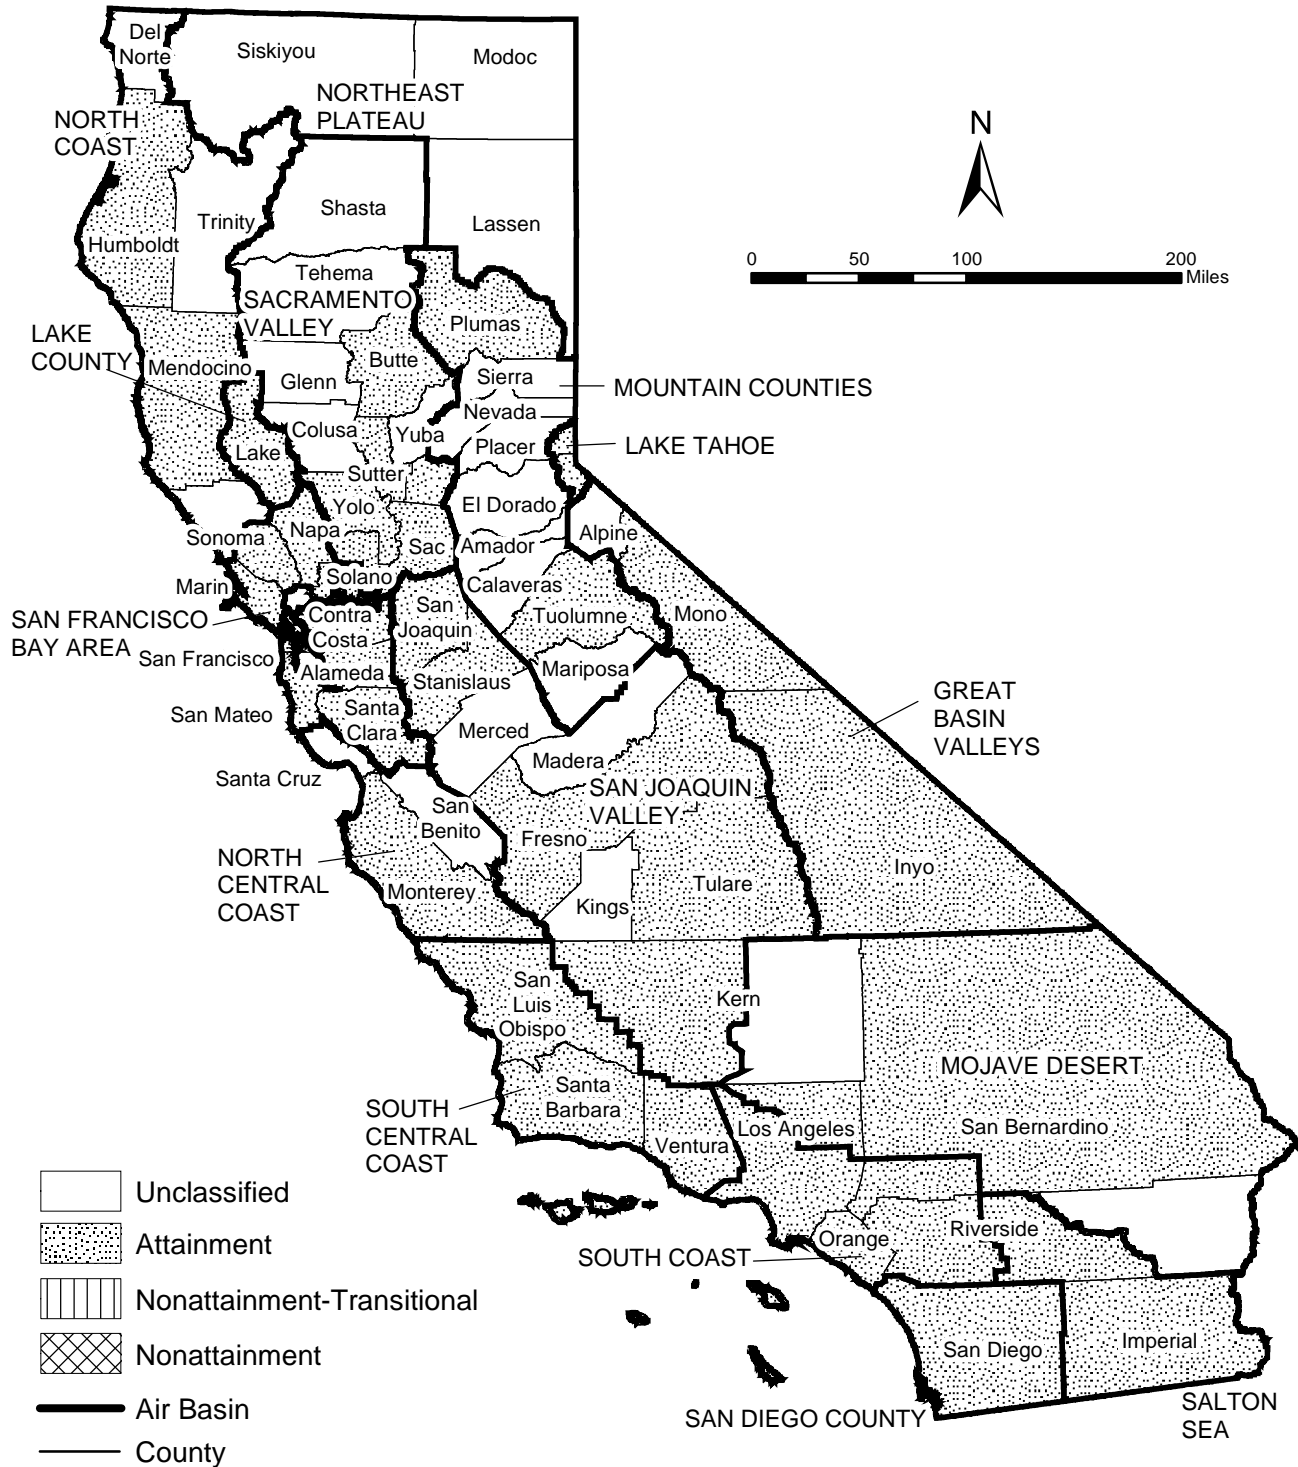

2013 Area Designations for State Ambient Air Quality Standards NITROGEN DIOXIDE



2013 Area Designations for State Ambient Air Quality Standards SULFUR DIOXIDE



2013 Area Designations for State Ambient Air Quality Standards LEAD



Area Designations for National Ambient Air Quality Standards 8-HOUR OZONE



Source Date:
June 2013
Air Quality Planning Branch, AQPSD

Area Designations for National Ambient Air Quality Standards PM10




Source Date:
September 2013
Air Quality Planning Branch, AQPSD

Area Designations for National Ambient Air Quality Standards PM2.5




Area Designations for National Ambient Air Quality Standards CARBON MONOXIDE

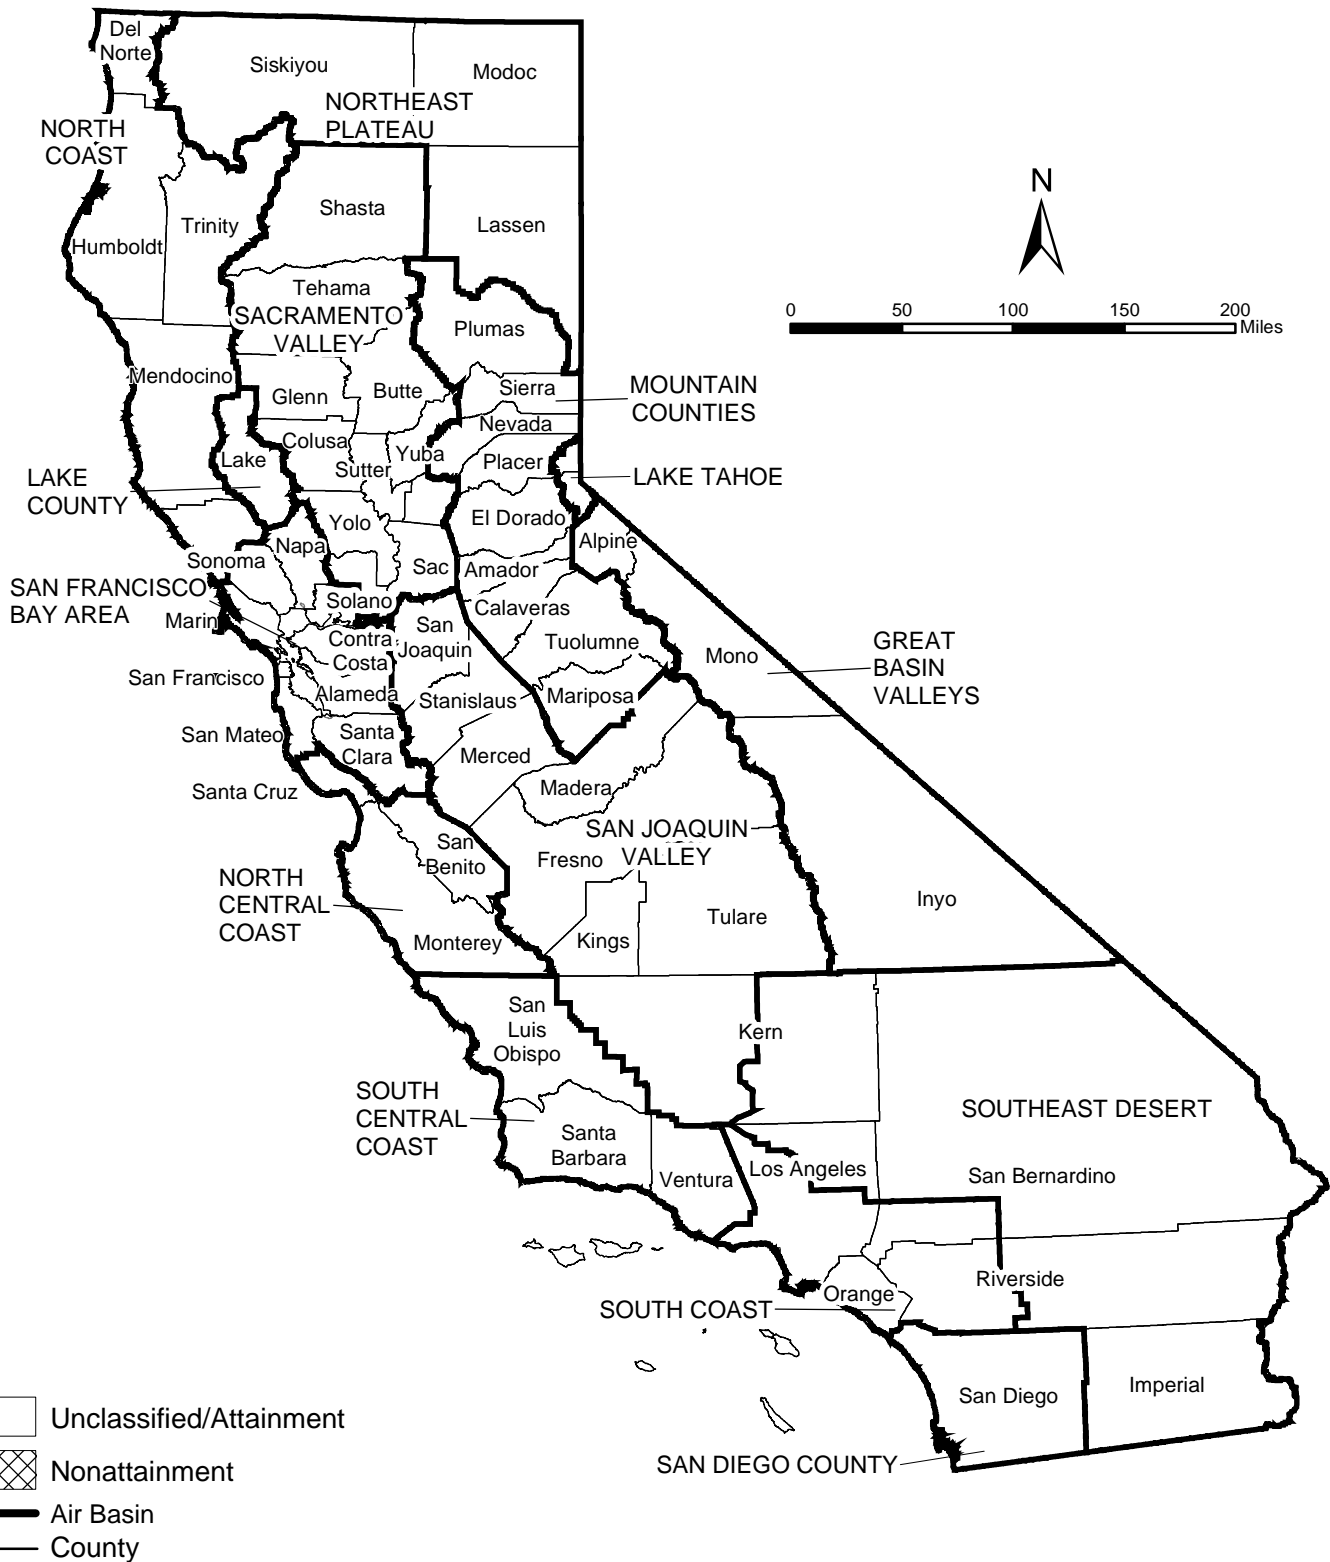

Source Date:
June 2013
Air Quality Planning Branch, AQPSD

Area Designations for National Ambient Air Quality Standards SULFUR DIOXIDE

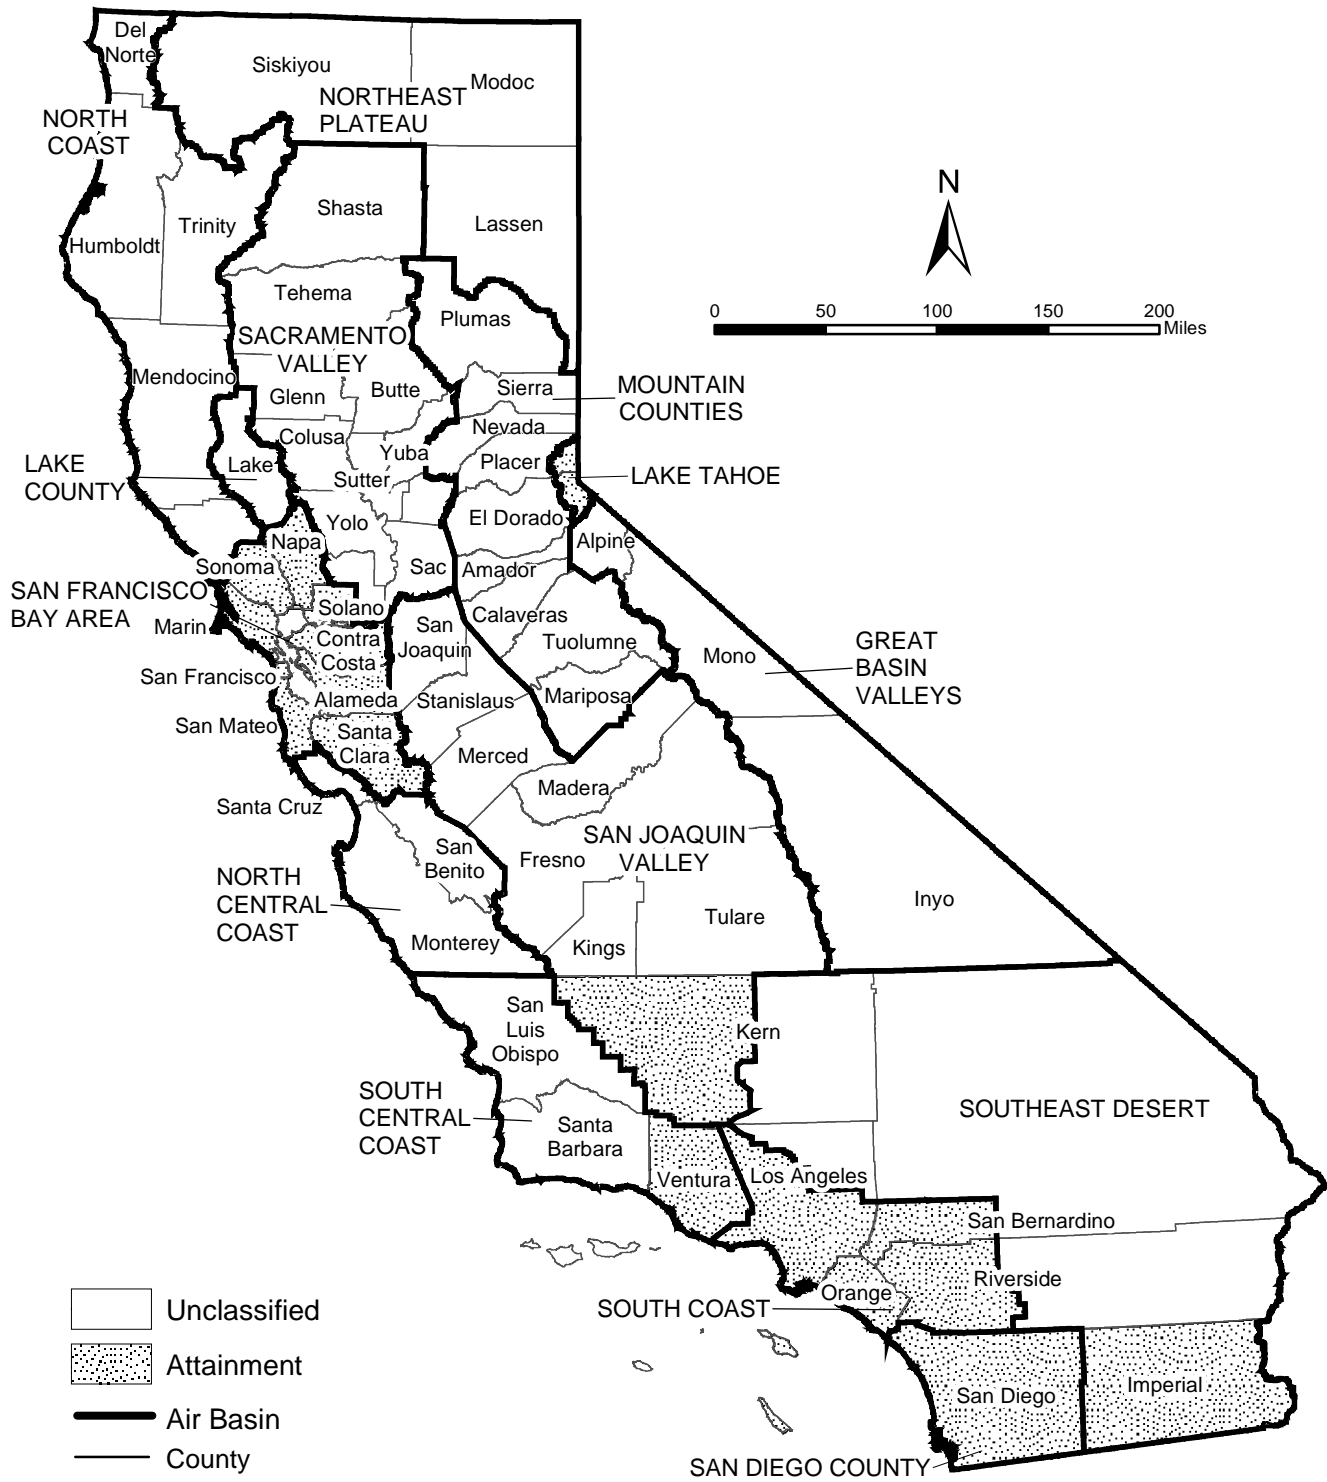

Area Designations for National Ambient Air Quality Standards LEAD



Source Date:
June 2013
Air Quality Planning Branch, AQPSD